

# PS-8750

USA Model  
E Model



## STEREO TURNTABLE SYSTEM

### SPECIFICATIONS

#### TURNTABLE (Semi-auto player)

**Platter:** 32 cm (12<sup>5</sup>/<sub>8</sub> inches), diecast aluminum  
**Drive System:** Direct drive, crystal lock control system  
**Speed:** 33<sup>1</sup>/<sub>3</sub> rpm, 45 rpm  
**Pitch Control Range:**  $\pm 4\%$  (Crystal Lock Switch: OFF)  
**Wow and Flutter:** Less than  $\pm 0.04\%$  (DIN, weighted)  
Less than 0.025% (NAB, weighted rms)  
**S/N Ratio:** Greater than 70 dB (DIN, B-curve weighted)

	Position of the Xtal Lock Switch	
	ON	OFF
Initial Drift:	within 0.0005%	within 0.1%
Load Characteristics: (at 3 g tracking force)	0%	less than 0.5%
Speed Deviation:	within 0.003%	variable

**Tonearm Height Adjustment Range:** 7 mm (<sup>9</sup>/<sub>32</sub> inches)  
**Shell Weight:** 12.5 g (SH-160)  
**Cartridge Weight Range:** 3–10 g  
(8–14 g with extra weight)  
(13.5–19.5 g with extra weight)

#### GENERAL

**Power Requirements:** 120 V ac, 60 Hz (USA Model)  
110, 127, 220 or 240 V ac, 50/60 Hz (E Model)  
**Power Consumption:** 20 W  
**Dimensions:** 458(w) x 184(h) x 395(d) mm  
18<sup>1</sup>/<sub>16</sub>(w) x 7<sup>1</sup>/<sub>4</sub>(h) x 15<sup>9</sup>/<sub>16</sub>(d) inches  
including projecting parts and controls.  
**Weight:** Approx. 14.2 kg, 31 lb 5 oz (net)  
Approx. 19 kg, 41 lb 14 oz (with shipping carton)

#### TONEARM

**Type:** Statically balanced, universal  
**Arm Length:** 320 mm (12<sup>5</sup>/<sub>8</sub> inches), overall  
237 mm (9<sup>3</sup>/<sub>8</sub> inches), pivot-to-stylus  
**Overhang:** 15 mm (<sup>19</sup>/<sub>32</sub> inches)  
**Tracking Error:** +2°, -2°  
**Tracking-force Adjustment Range:** 0–2.5 g (calibrated every 0.25 g)


# SONY®

## SERVICE MANUAL

## NOTE: SELECTION OF POWER FREQUENCY

### Procedure:

1. Remove the turntable.
2. Make sure the power frequency of the area this set is used in, and then select the position of Frequency Selector Switch shown in figure below.

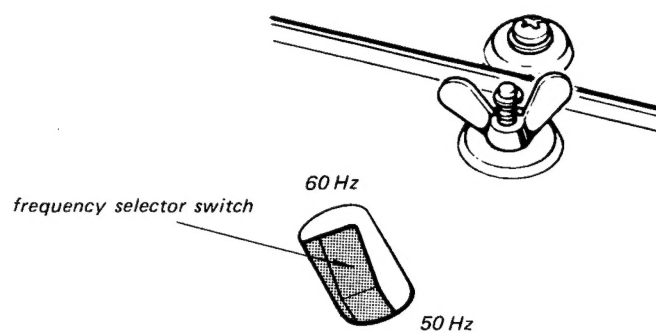

# SECTION 1 OUTLINE

## 1-1. BLOCK DIAGRAM

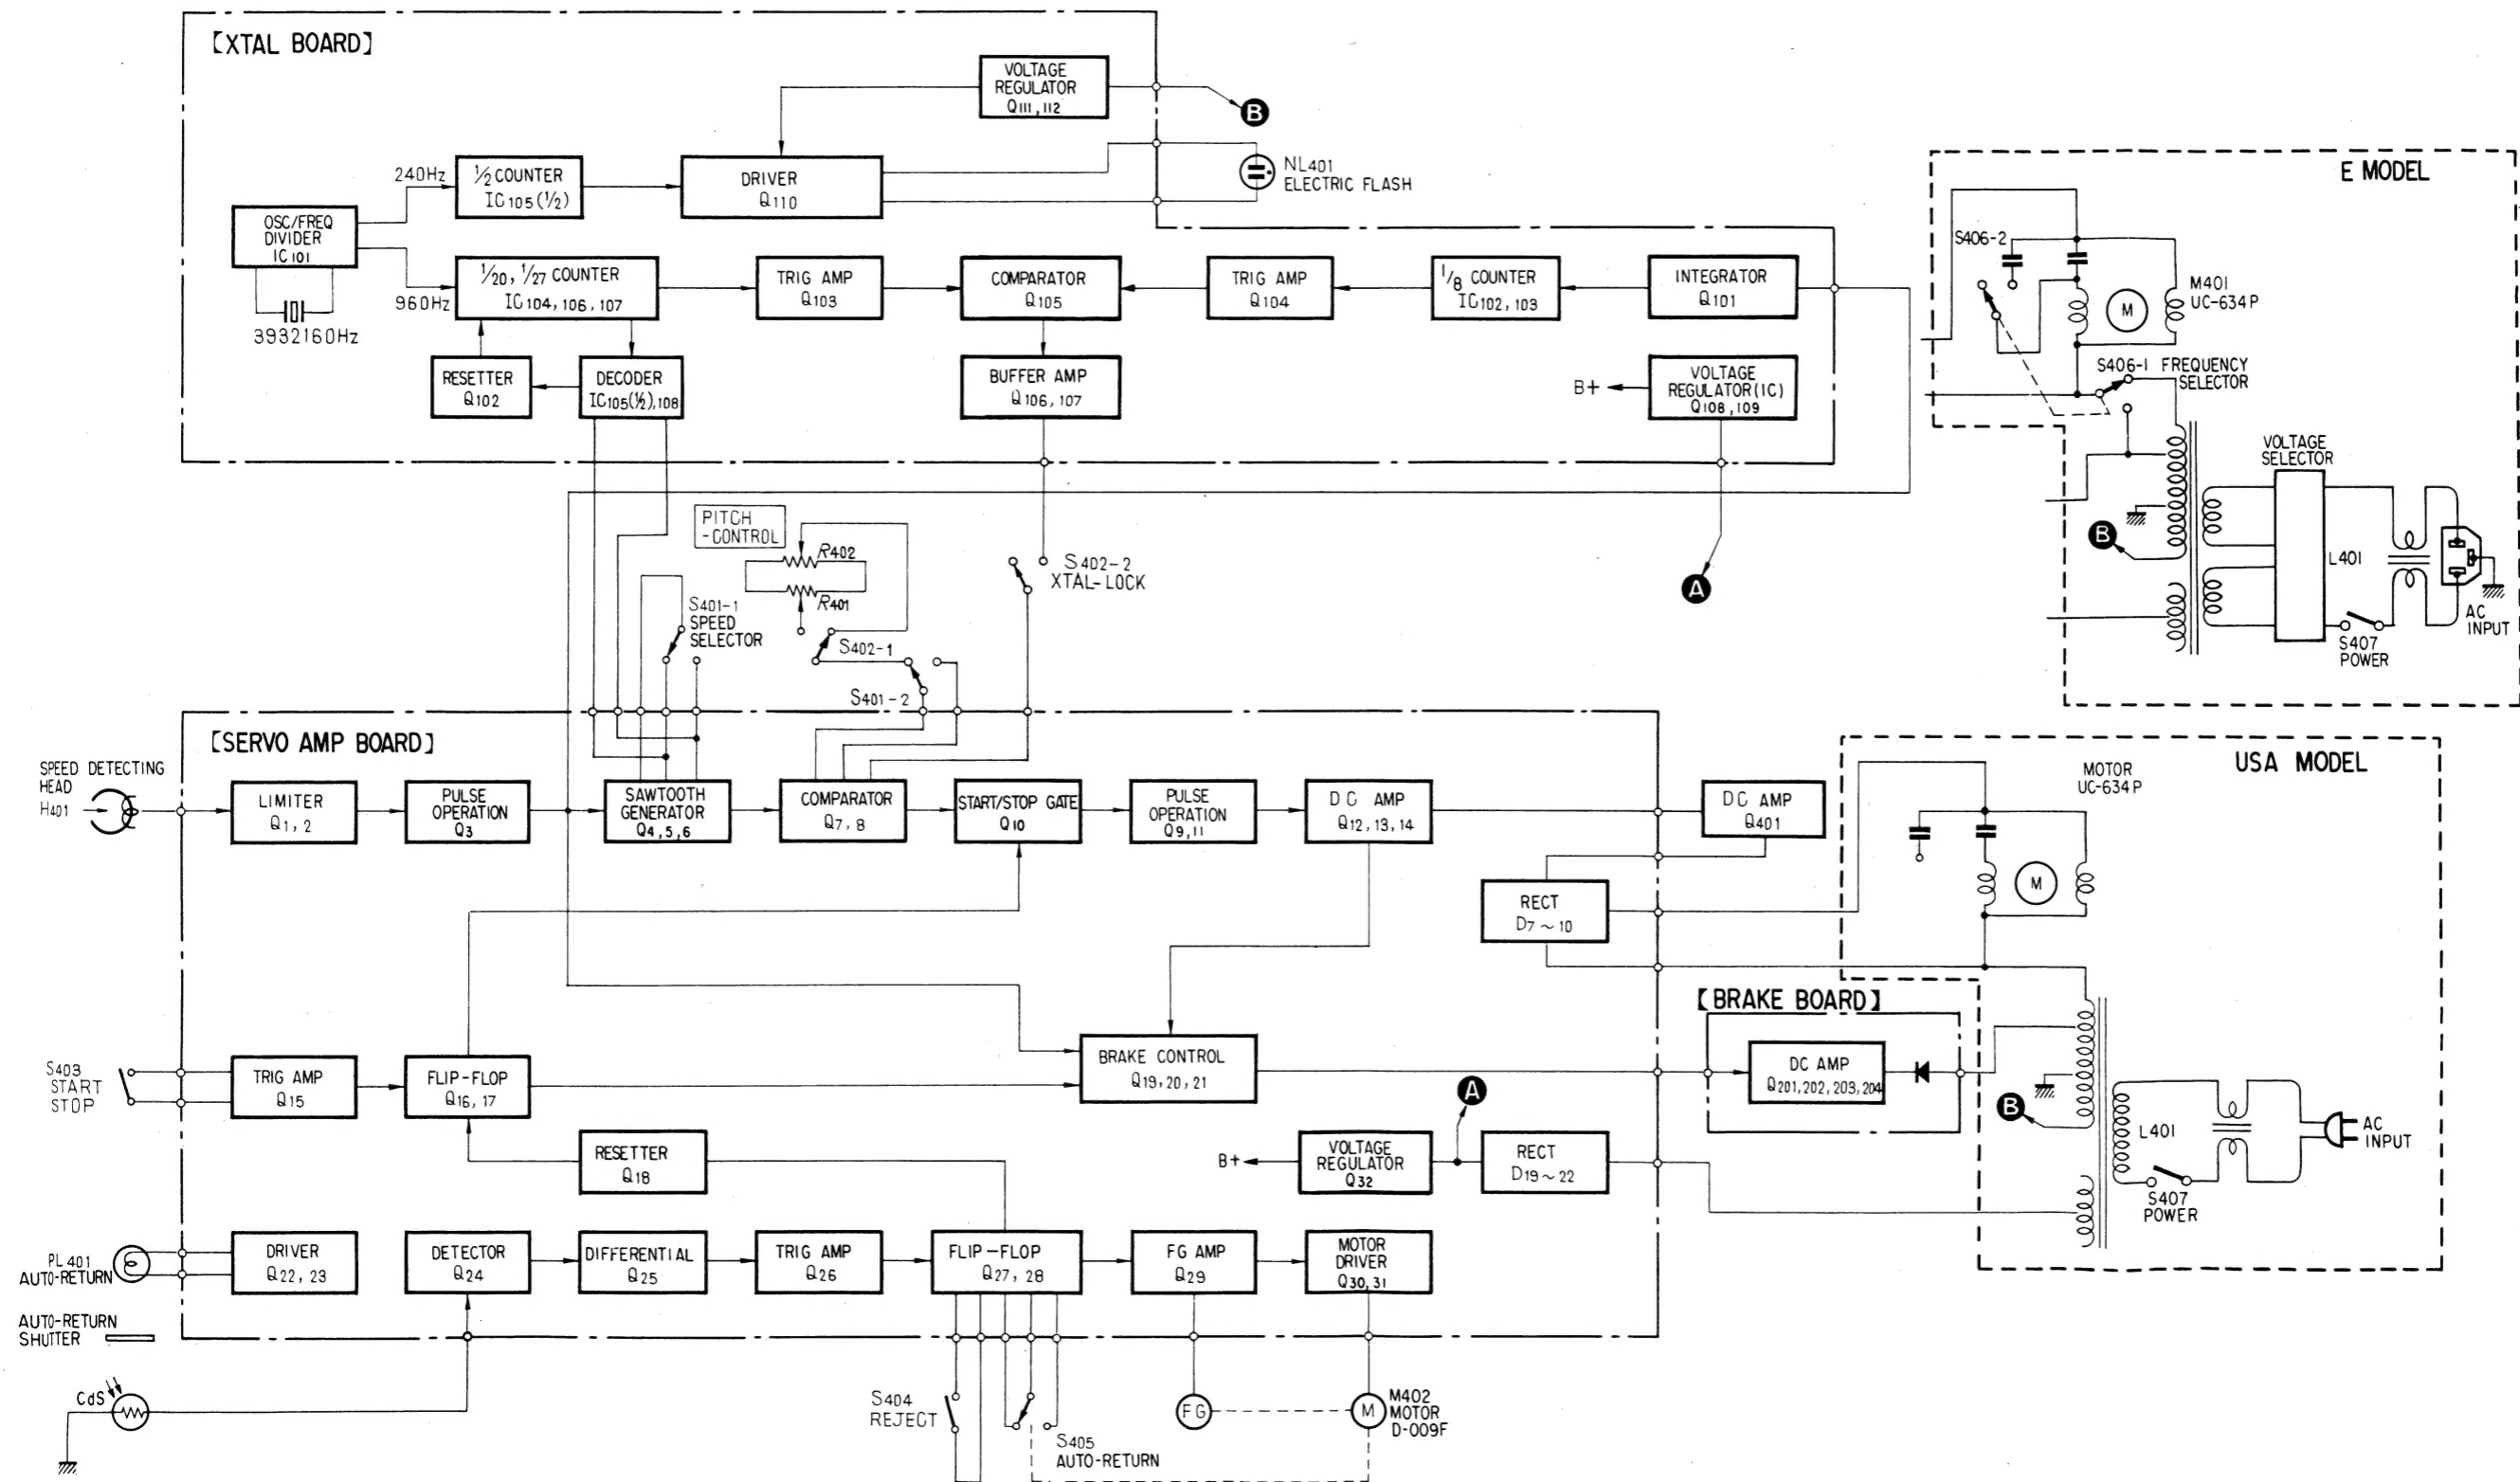


Fig. 1-1. Block diagram

## 1-2. EXTERNAL VIEW

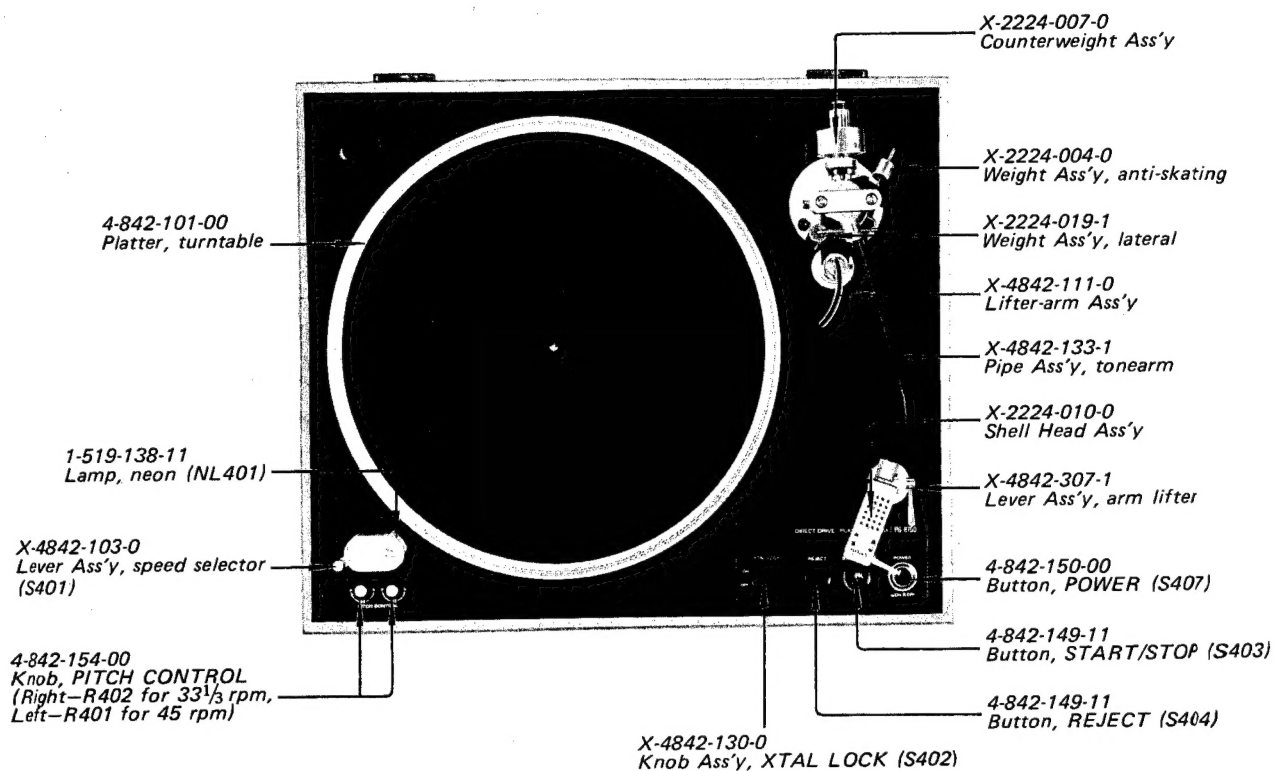


Fig. 1-2. External view

## 1-3. INTERNAL VIEW

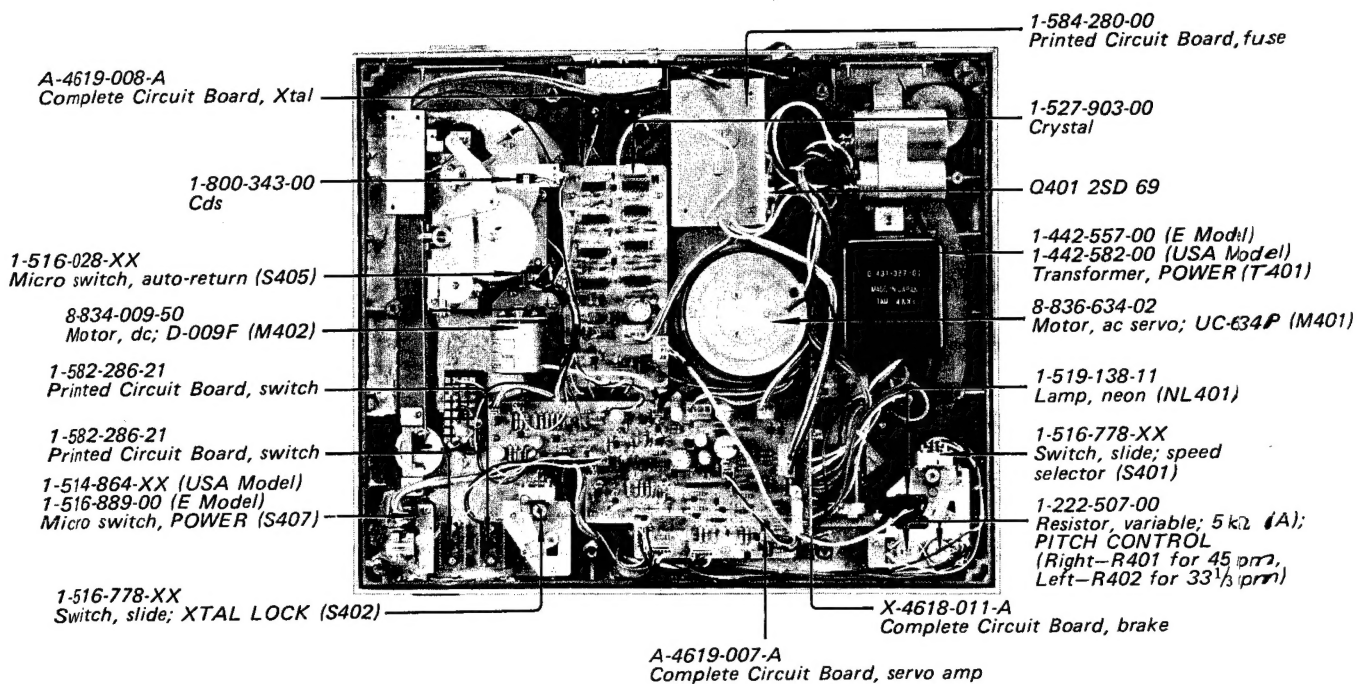


Fig. 1-3. Internal view

## SECTION 2 DISASSEMBLY AND REPLACEMENT

### 2-1. TOP COVER REMOVAL

1. Open the top cover ( ❶ ).
2. Lift the top cover toward ( ❷ ).

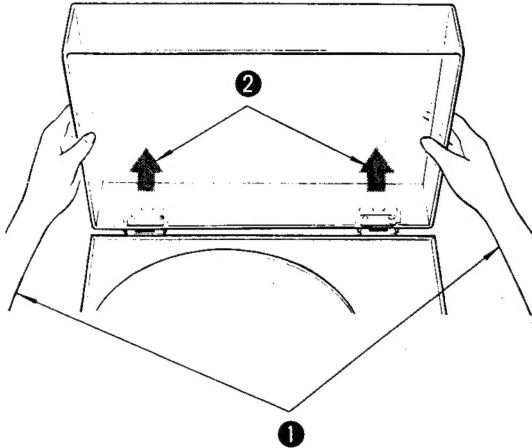


Fig. 2-1. Top cover removal

### 2-2. BOTTOM BOARD REMOVAL

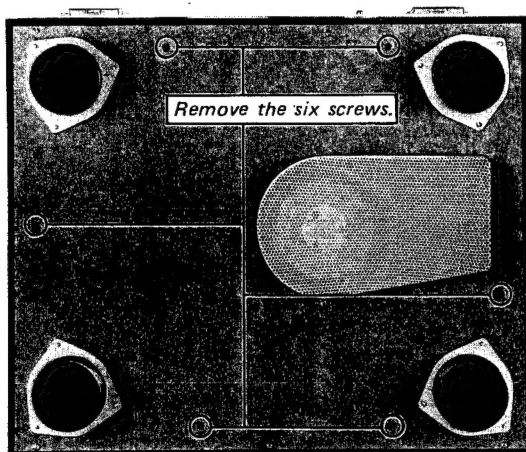


Fig. 2-2. Bottom board removal

### 2-3. CARTRIDGE REPLACEMENT

1. Pull out the four lead wires ( ❶ ).
2. Loosen the two screws and then replace the cartridge ( ❷ ).
3. Connect the four lead wires to the cartridge as shown in Fig. 2-3. (c).

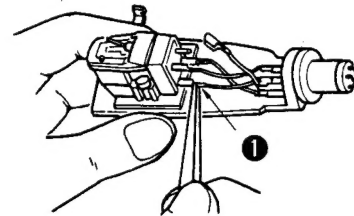


Fig. 2-3. (a) Pulling lead wires

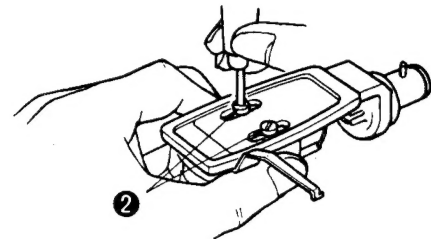


Fig. 2-3. (b) Loosening screws


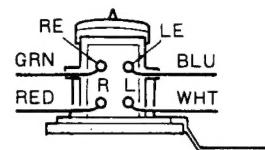



Fig. 2-3. (c) Lead wire connection

# SECTION 3 ELECTRICAL ADJUSTMENTS

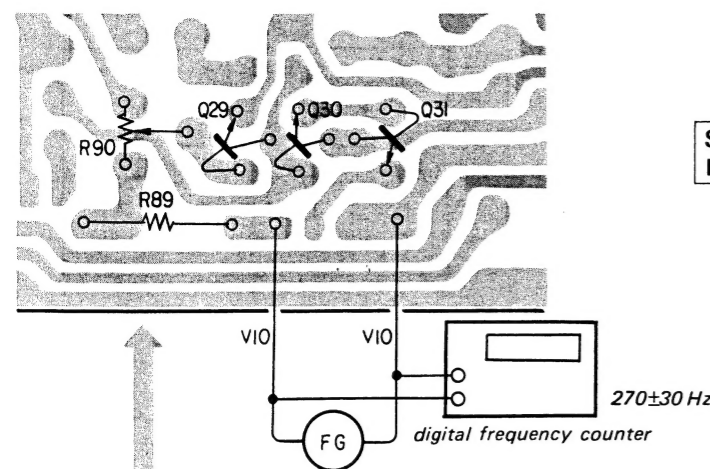

## SPEED ADJUSTMENT OF AUTOMATIC RETURN MOTOR

1. Depress the REJECT button to rotate the motor.
2. Adjust R90 ( ❶ ) for the  $270 \pm 30$  Hz reading on the digital frequency counter.

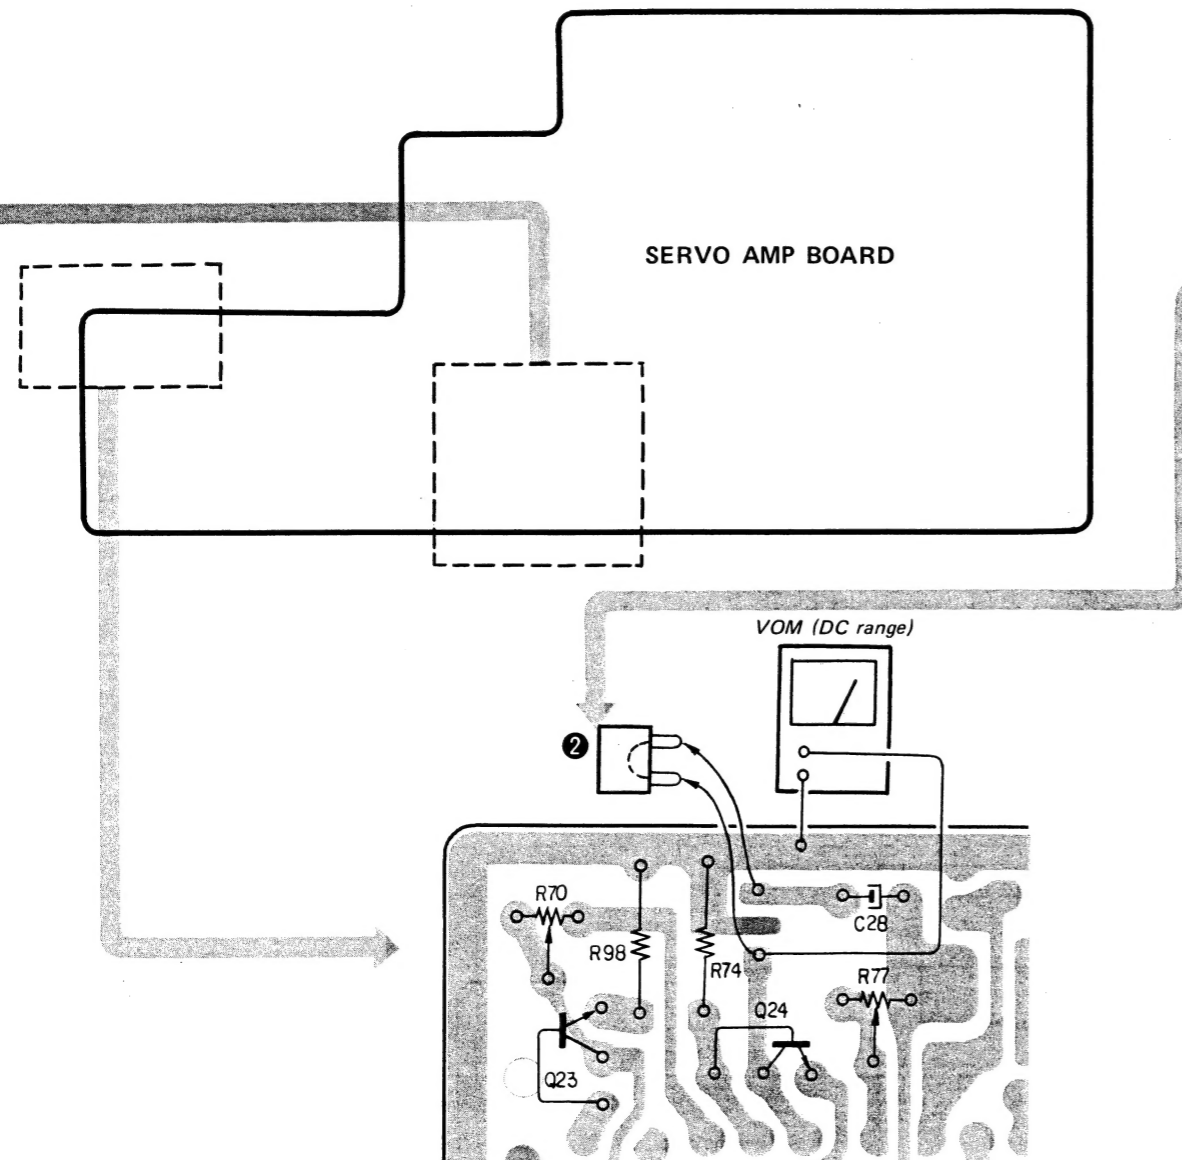

## AUTOMATIC RETURN ADJUSTMENT

### A. Lamp Brightness Adjustment

1. Remove the connector ( ❷ ).
2. Set the tonearm fully close to the center of turntable. Adjust R70 ( ❸ ) for the 2 V reading on the VOM.
3. Set the tonearm fully apart from the turntable. Adjust R70 ( ❸ ) for  $12 \pm 0.5$  V dc reading on the VOM.

### B. Operational Check at Automatic Return by Using a Record.

1. Check the automatic return operation.
2. If it does not work properly, perform the following two procedures.


#### • Procedure (a)

Adjust the screw ( ❹ ) referring to the table below.

Time of automatic return	Turning direction of the screw
Too early	Clockwise
Too late	Counterclockwise

#### • Procedure (b)

Turn carefully R77 ( ❺ ) counterclockwise to make the sensitivity of automatic return detector circuit higher.

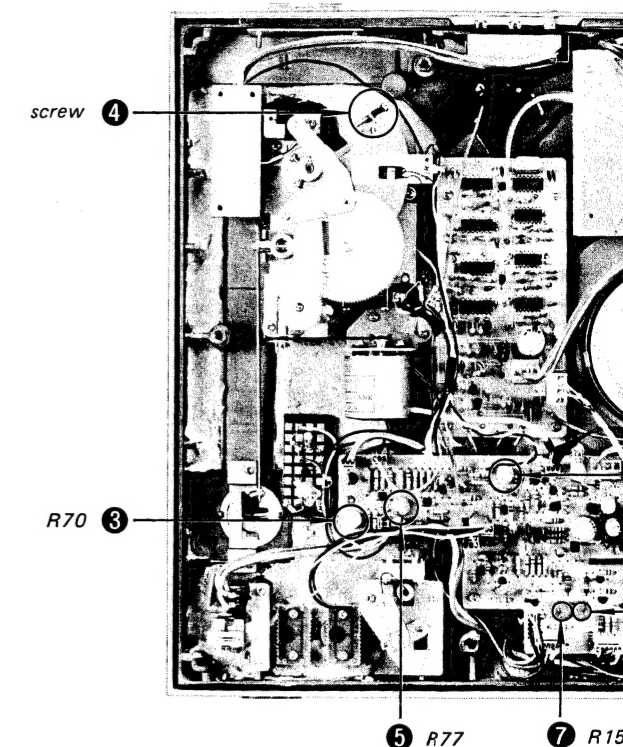

the  
iding

AUTOMATIC RETURN ADJUSTMENT

A. Lamp Brightness Adjustment

1. Remove the connector ( 2 ).
2. Set the tonearm fully close to the center of turntable. Adjust R70 ( 3 ) for the 2 V reading on the VOM.
3. Set the tonearm fully apart from the turntable. Adjust R70 ( 3 ) for 12±0.5 V dc reading on the VOM.

B. Operational Check at Automatic Return by Using a Record.

1. Check the automatic return operation.
2. If it does not work properly, perform the following two procedures.


• Procedure (a)

Adjust the screw ( 4 ) referring to the table below.

Time of automatic return	Turning direction of the screw
Too early	Clockwise
Too late	Counterclockwise

• Procedure (b)

Turn carefully R77 ( 5 ) counterclockwise to make the sensitivity of automatic return detector circuit higher.

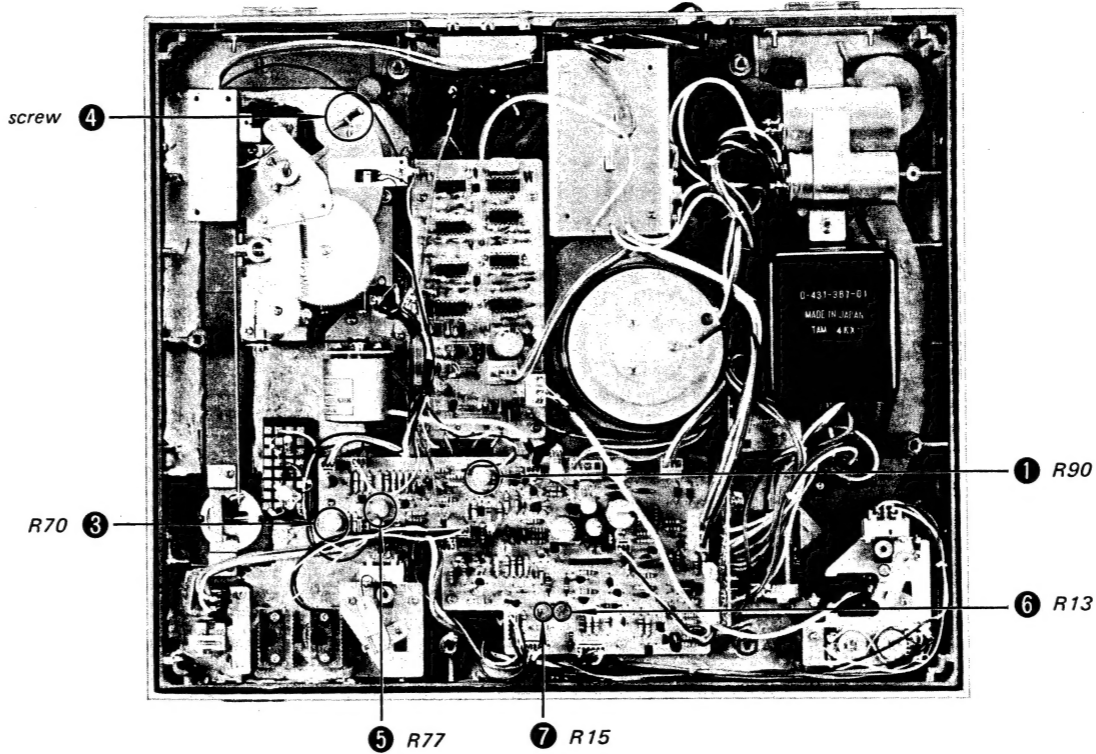


TURNTABLE SPEED ADJUSTMENT

1. Set the XTAL LOCK switch to OFF.
2. Set the PITCH CONTROL knob to mechanical mid.
3. To obtain the speed deviation 0% of 45 rpm and 33 1/3 rpm, adjust R13 ( 6 ) for 45 rpm and R15 ( 7 ) for 33 1/3 rpm.
4. Make sure that the turntable speed is within the specified Pitch Control Range (±4% for each speed) when setting the PITCH CONTROL knob to maximum or minimum.
5. Make sure that the turntable speed is 45 rpm when setting the XTAL LOCK switch to ON and it never deviate by turning the PITCH CONTROL knob. Perform the same procedure for 33 1/3 rpm.
6. Make sure that the turntable speed is certainly 45 rpm after changing the START/STOP switch several times. Perform the same procedure for 33 1/3 rpm.


SECTION 4  
DIAGRAMS

4-1. MOUNTING DIAGRAM


Q1~4, 10, 12~21, 23~30, 101~107, 109  
Q111, 201: 2SC633A  
Q111, 201: 2SC926A




Q14: 2SA677




Q204: 2SC867  
Q112: 2SC1431




Q22: 2SC1474




Q202, 203: 2SA639S




Q31, 32, 108: 2SC1760



Q5, 6, 9, 11: 2SA677




Q7, 8: 2SC633A




(replacement transistor  
for 2SC1963)


Q110: 2SC1127




Q401: 2SD69




IC101: MSM5576  
IC102~106: M-53200P  
IC107: M-53210P  
IC108: M-53220P




D11~17, 23, 24, 1S1555  
D101~105, 107, 10E-2  
D7~10, 19~22, 10E-2  
D106, 108, 201, 202, 10E-2  
D203: 10E-4  
D25: 1T40




D3, 4: MV-5L




D1, 2: VD-1220





D18: EQA01-12S




【 XTAL BOARD 】

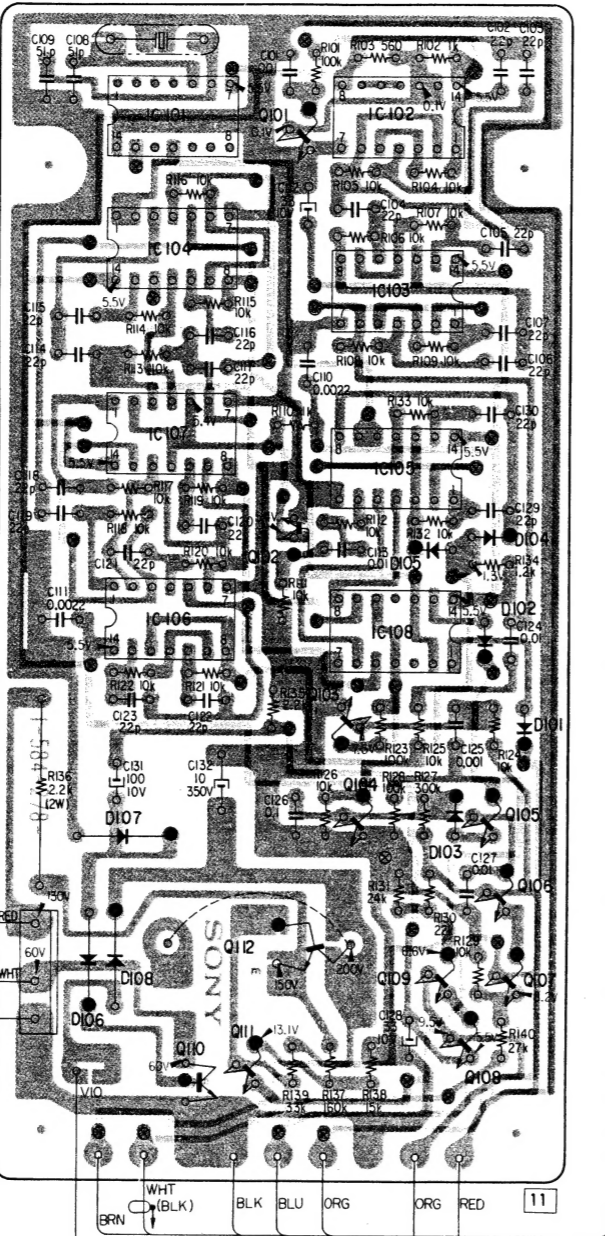


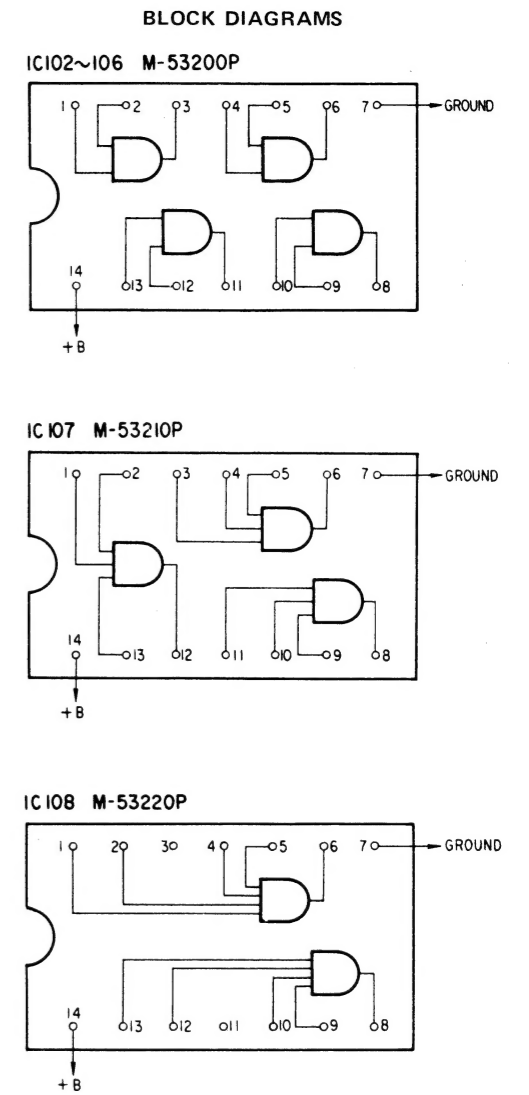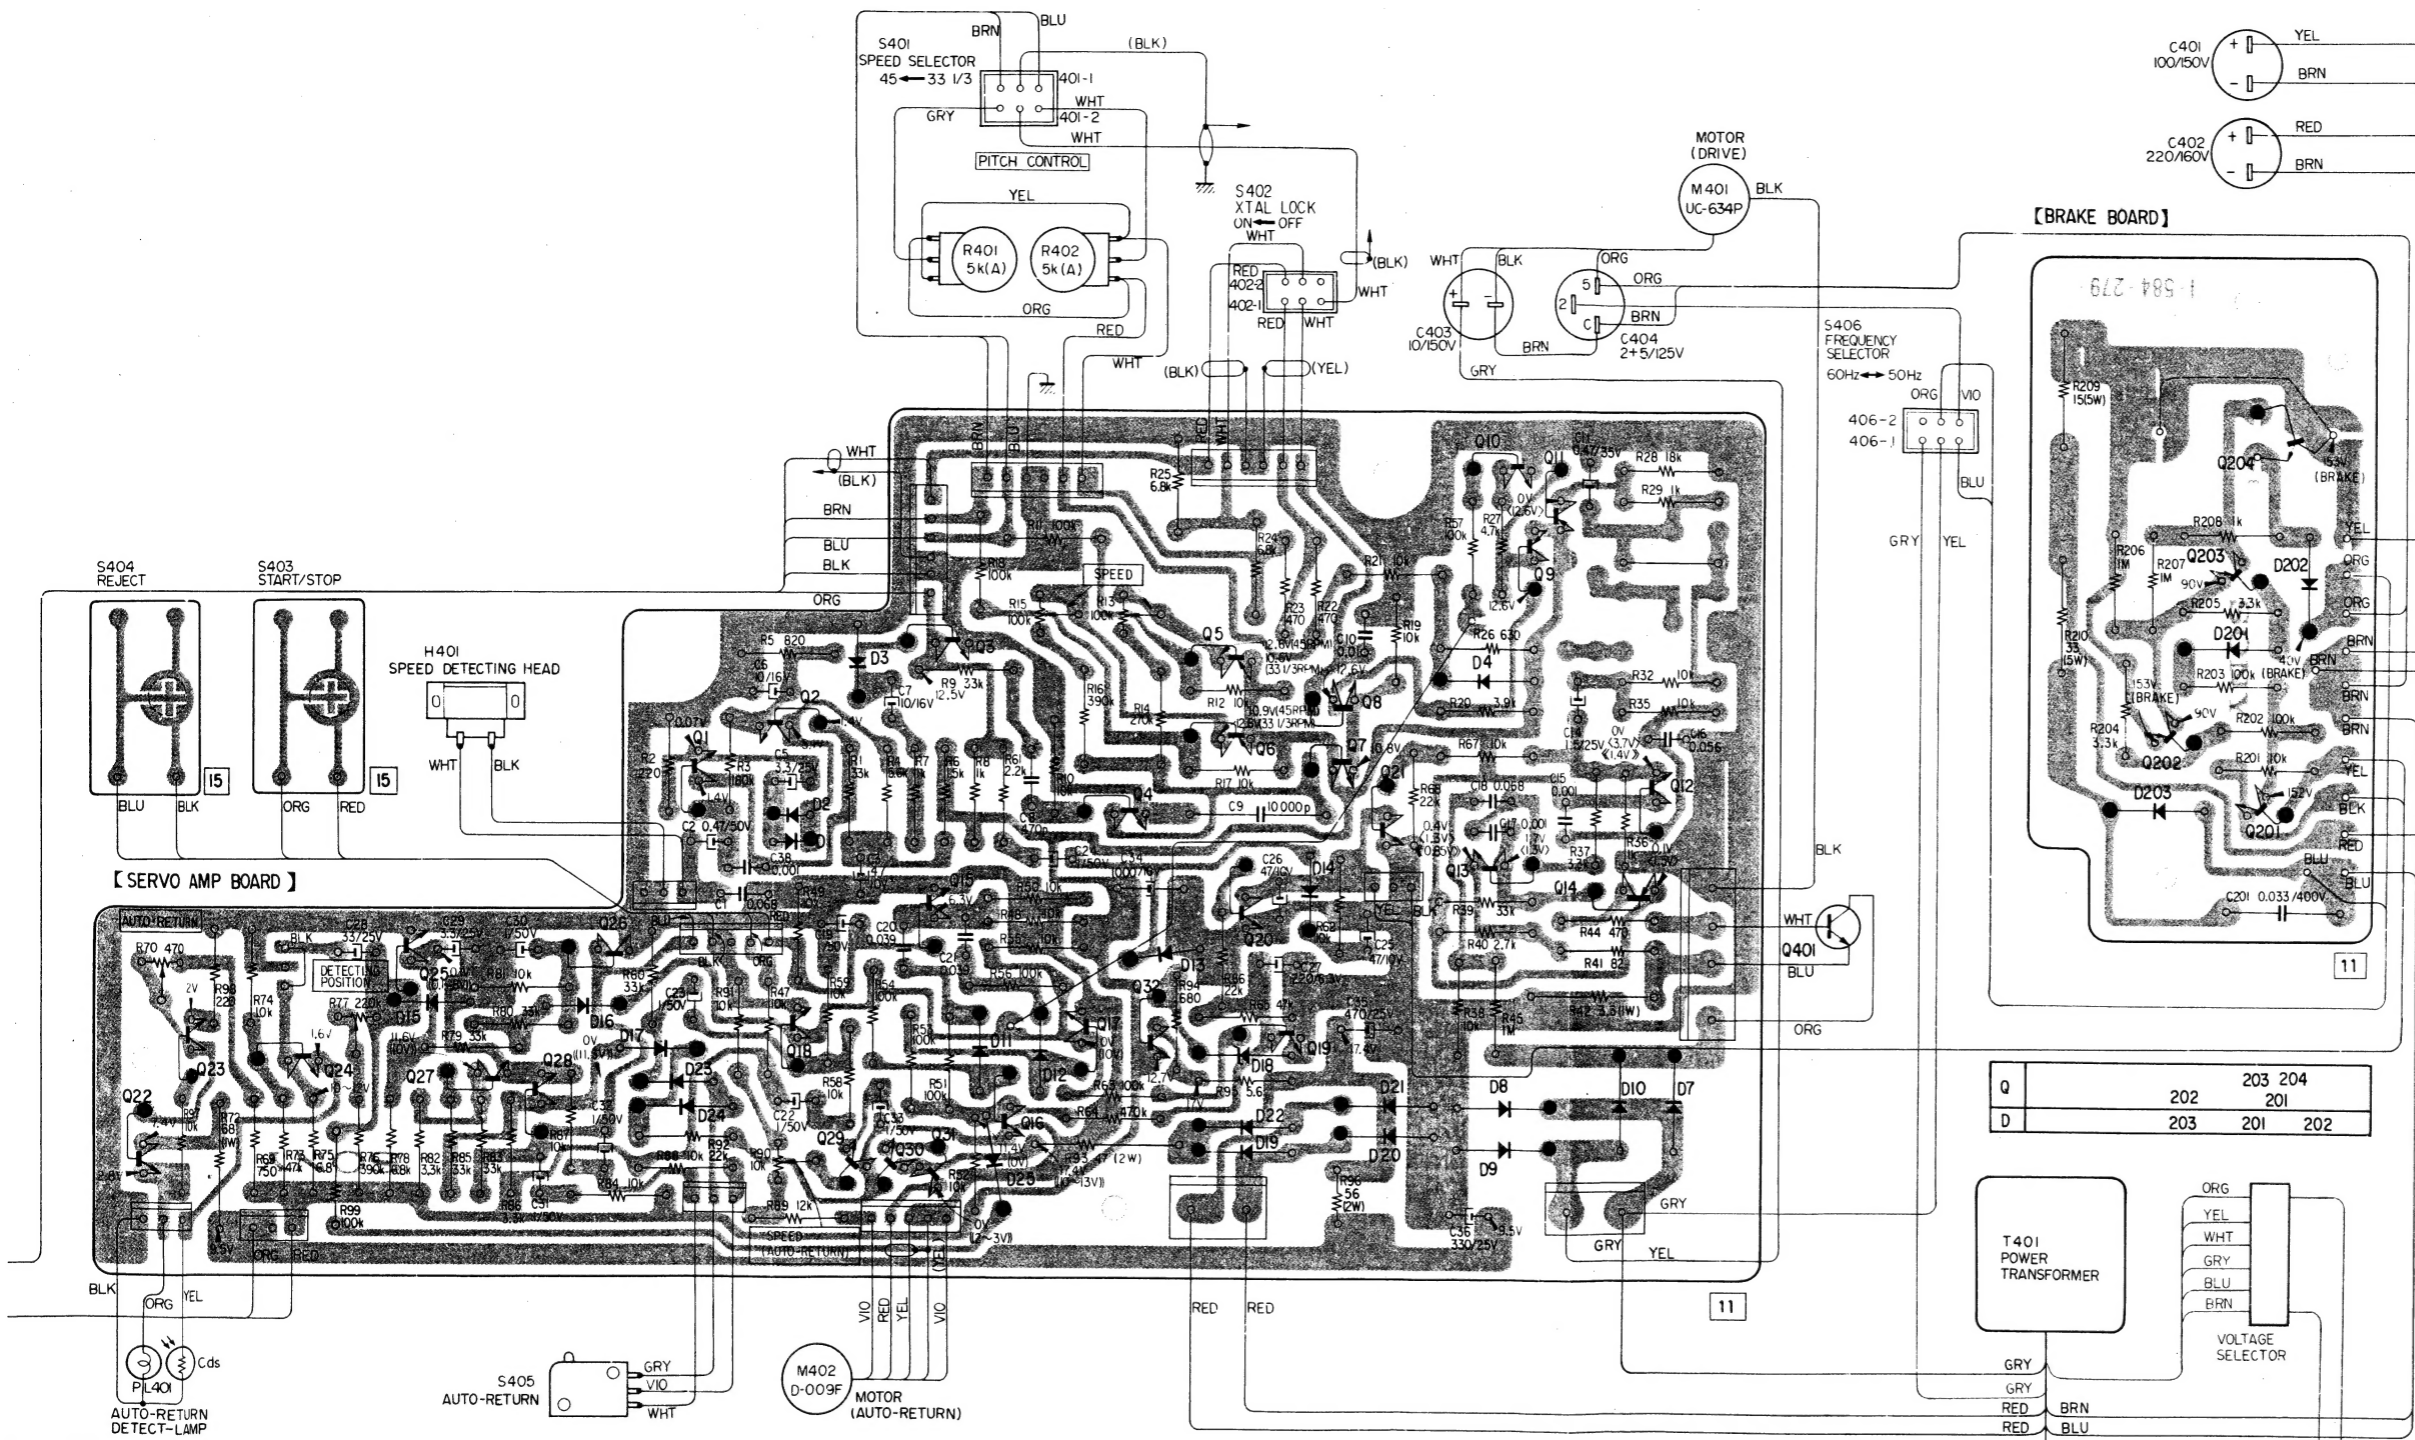

Q	22	23	24	25	27	28	26	1	2	3	15	16	17	4	32	5	8	10	11	12	401
D				15	16	17	23	24	2	3	11	12	13	18	19	20	21	4	8	10	7

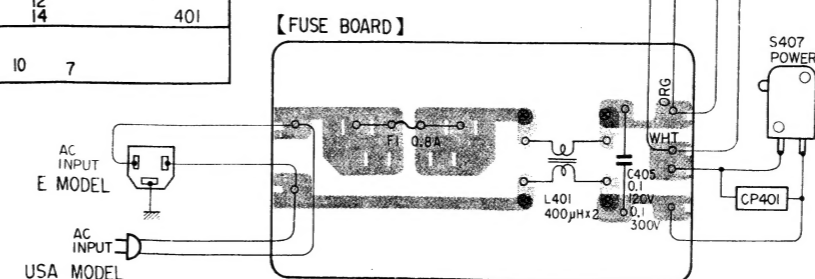

# 4-2. SCHEMATIC DIAGRAM

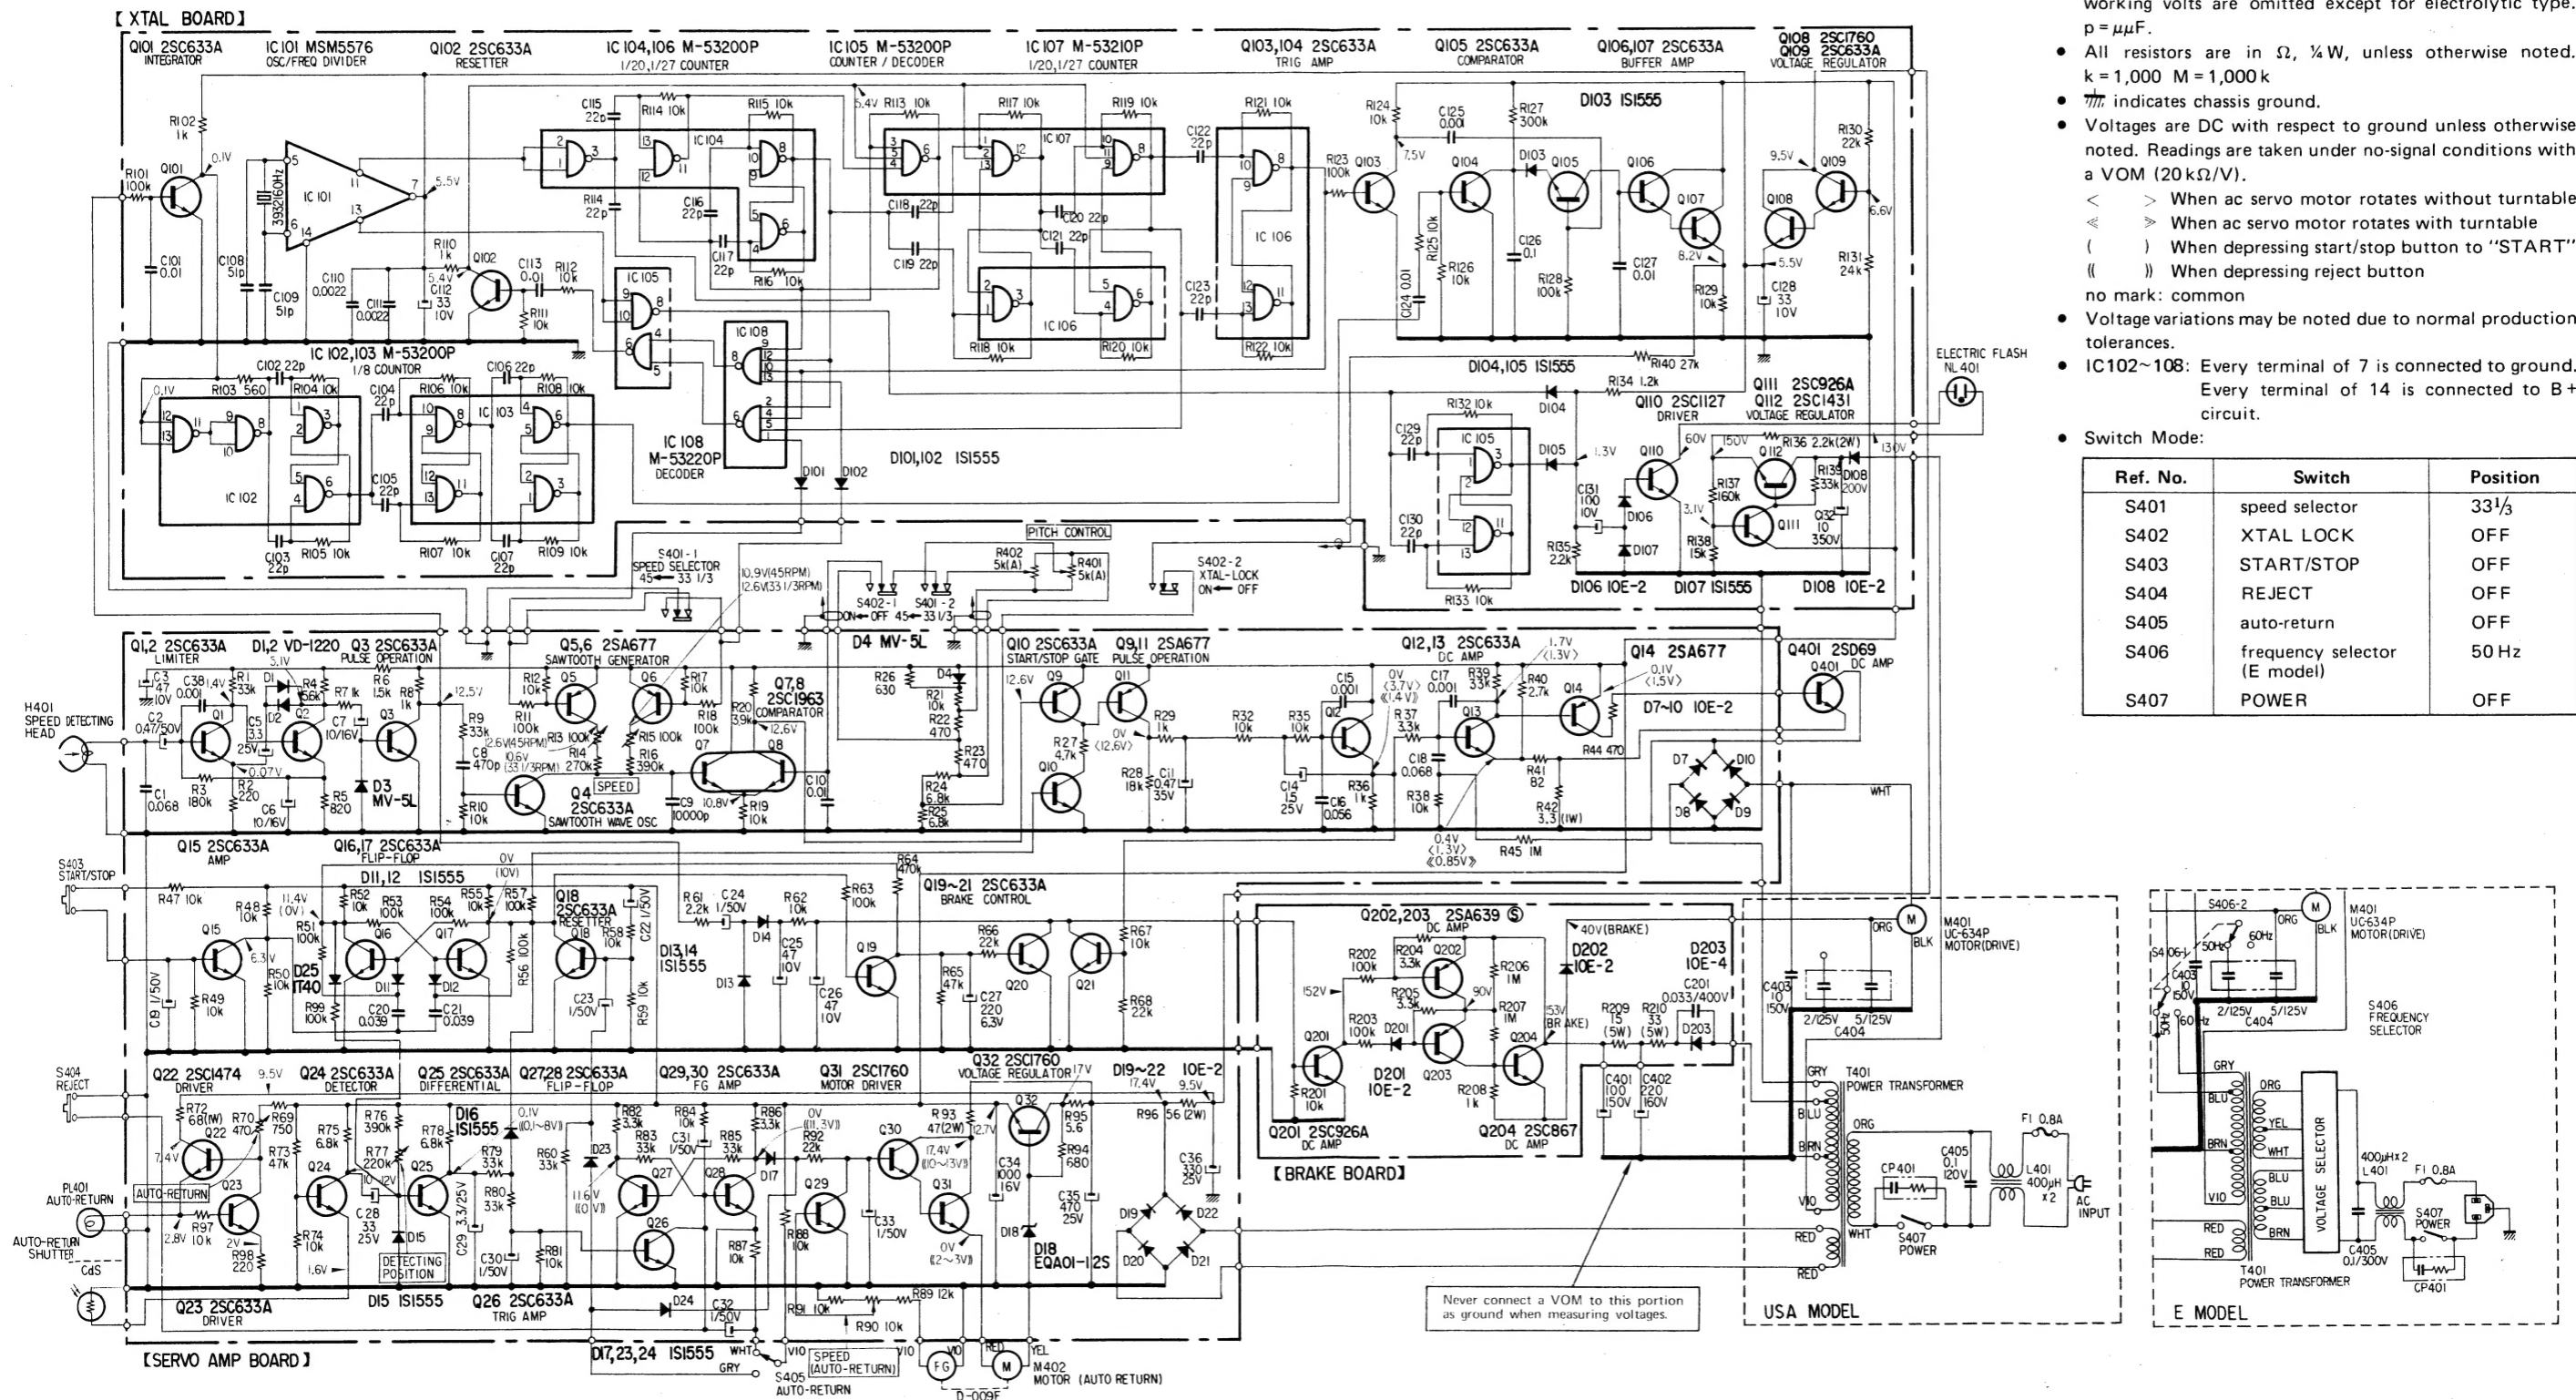


**PS-8750      PS-8750**

## SECTION 5


### EXPLODED VIEWS

**5-1.**

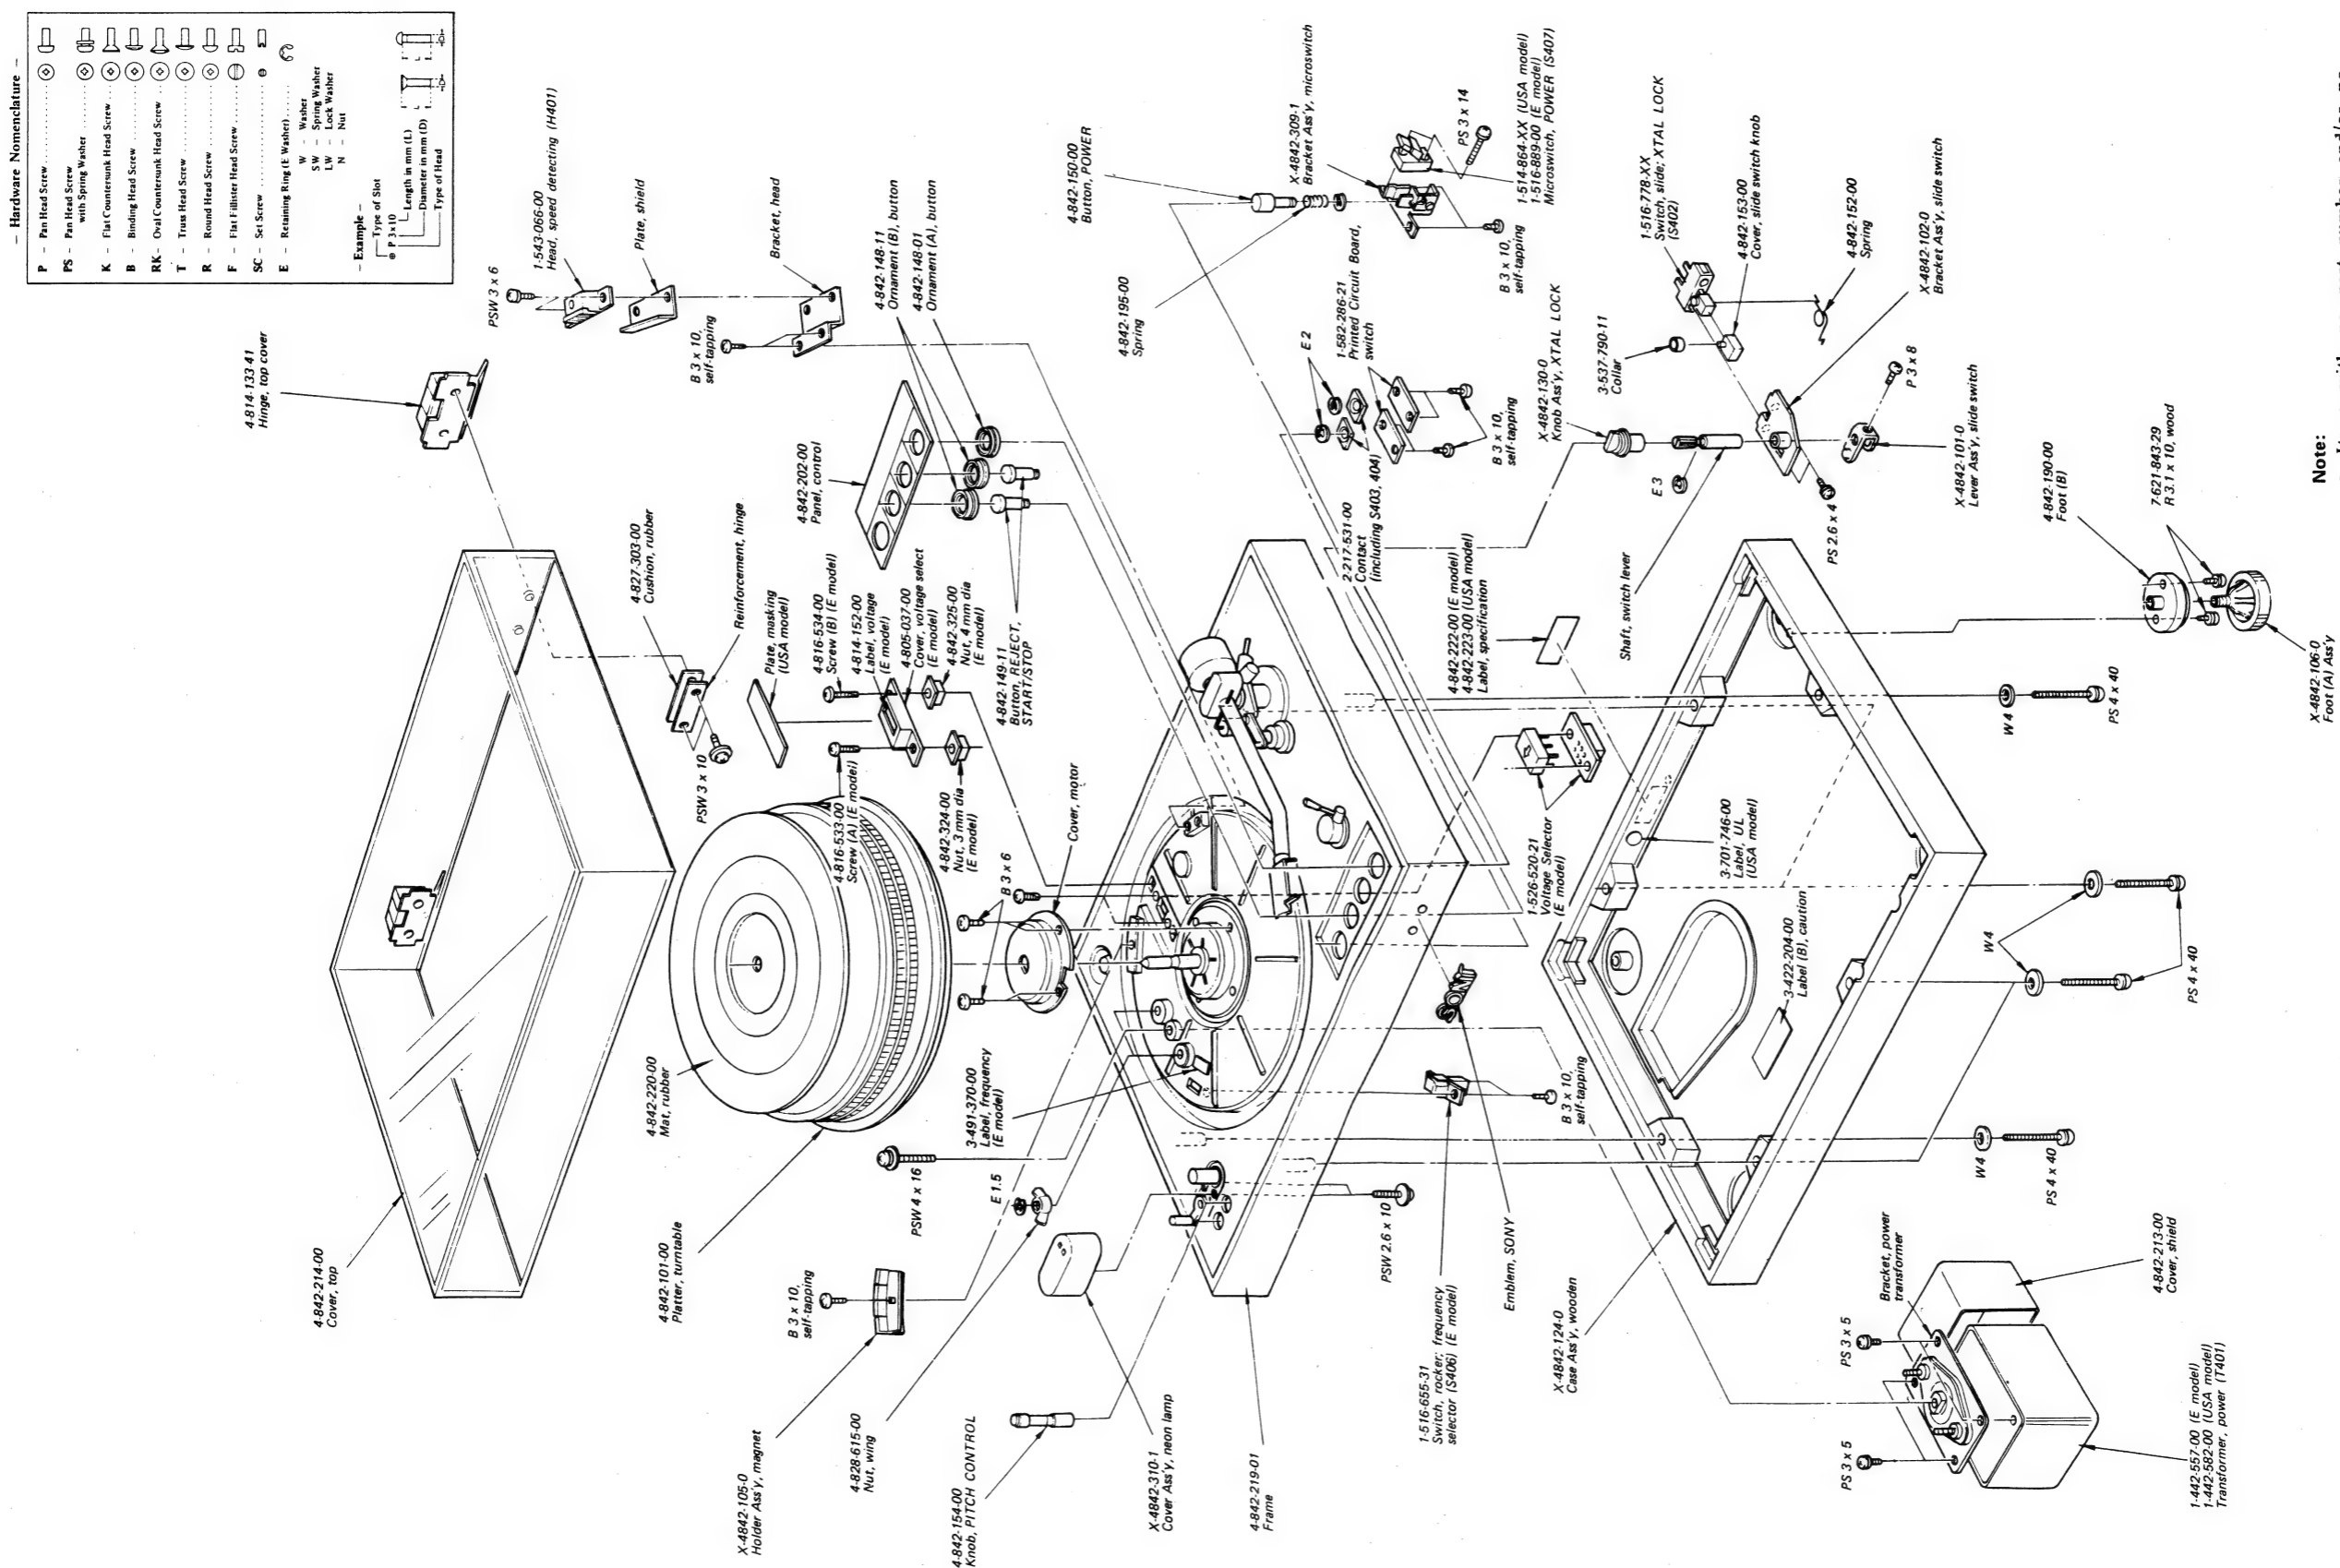


**Note:**

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- (-) = slotted head
- (□□T) shows the number of coils in spring.

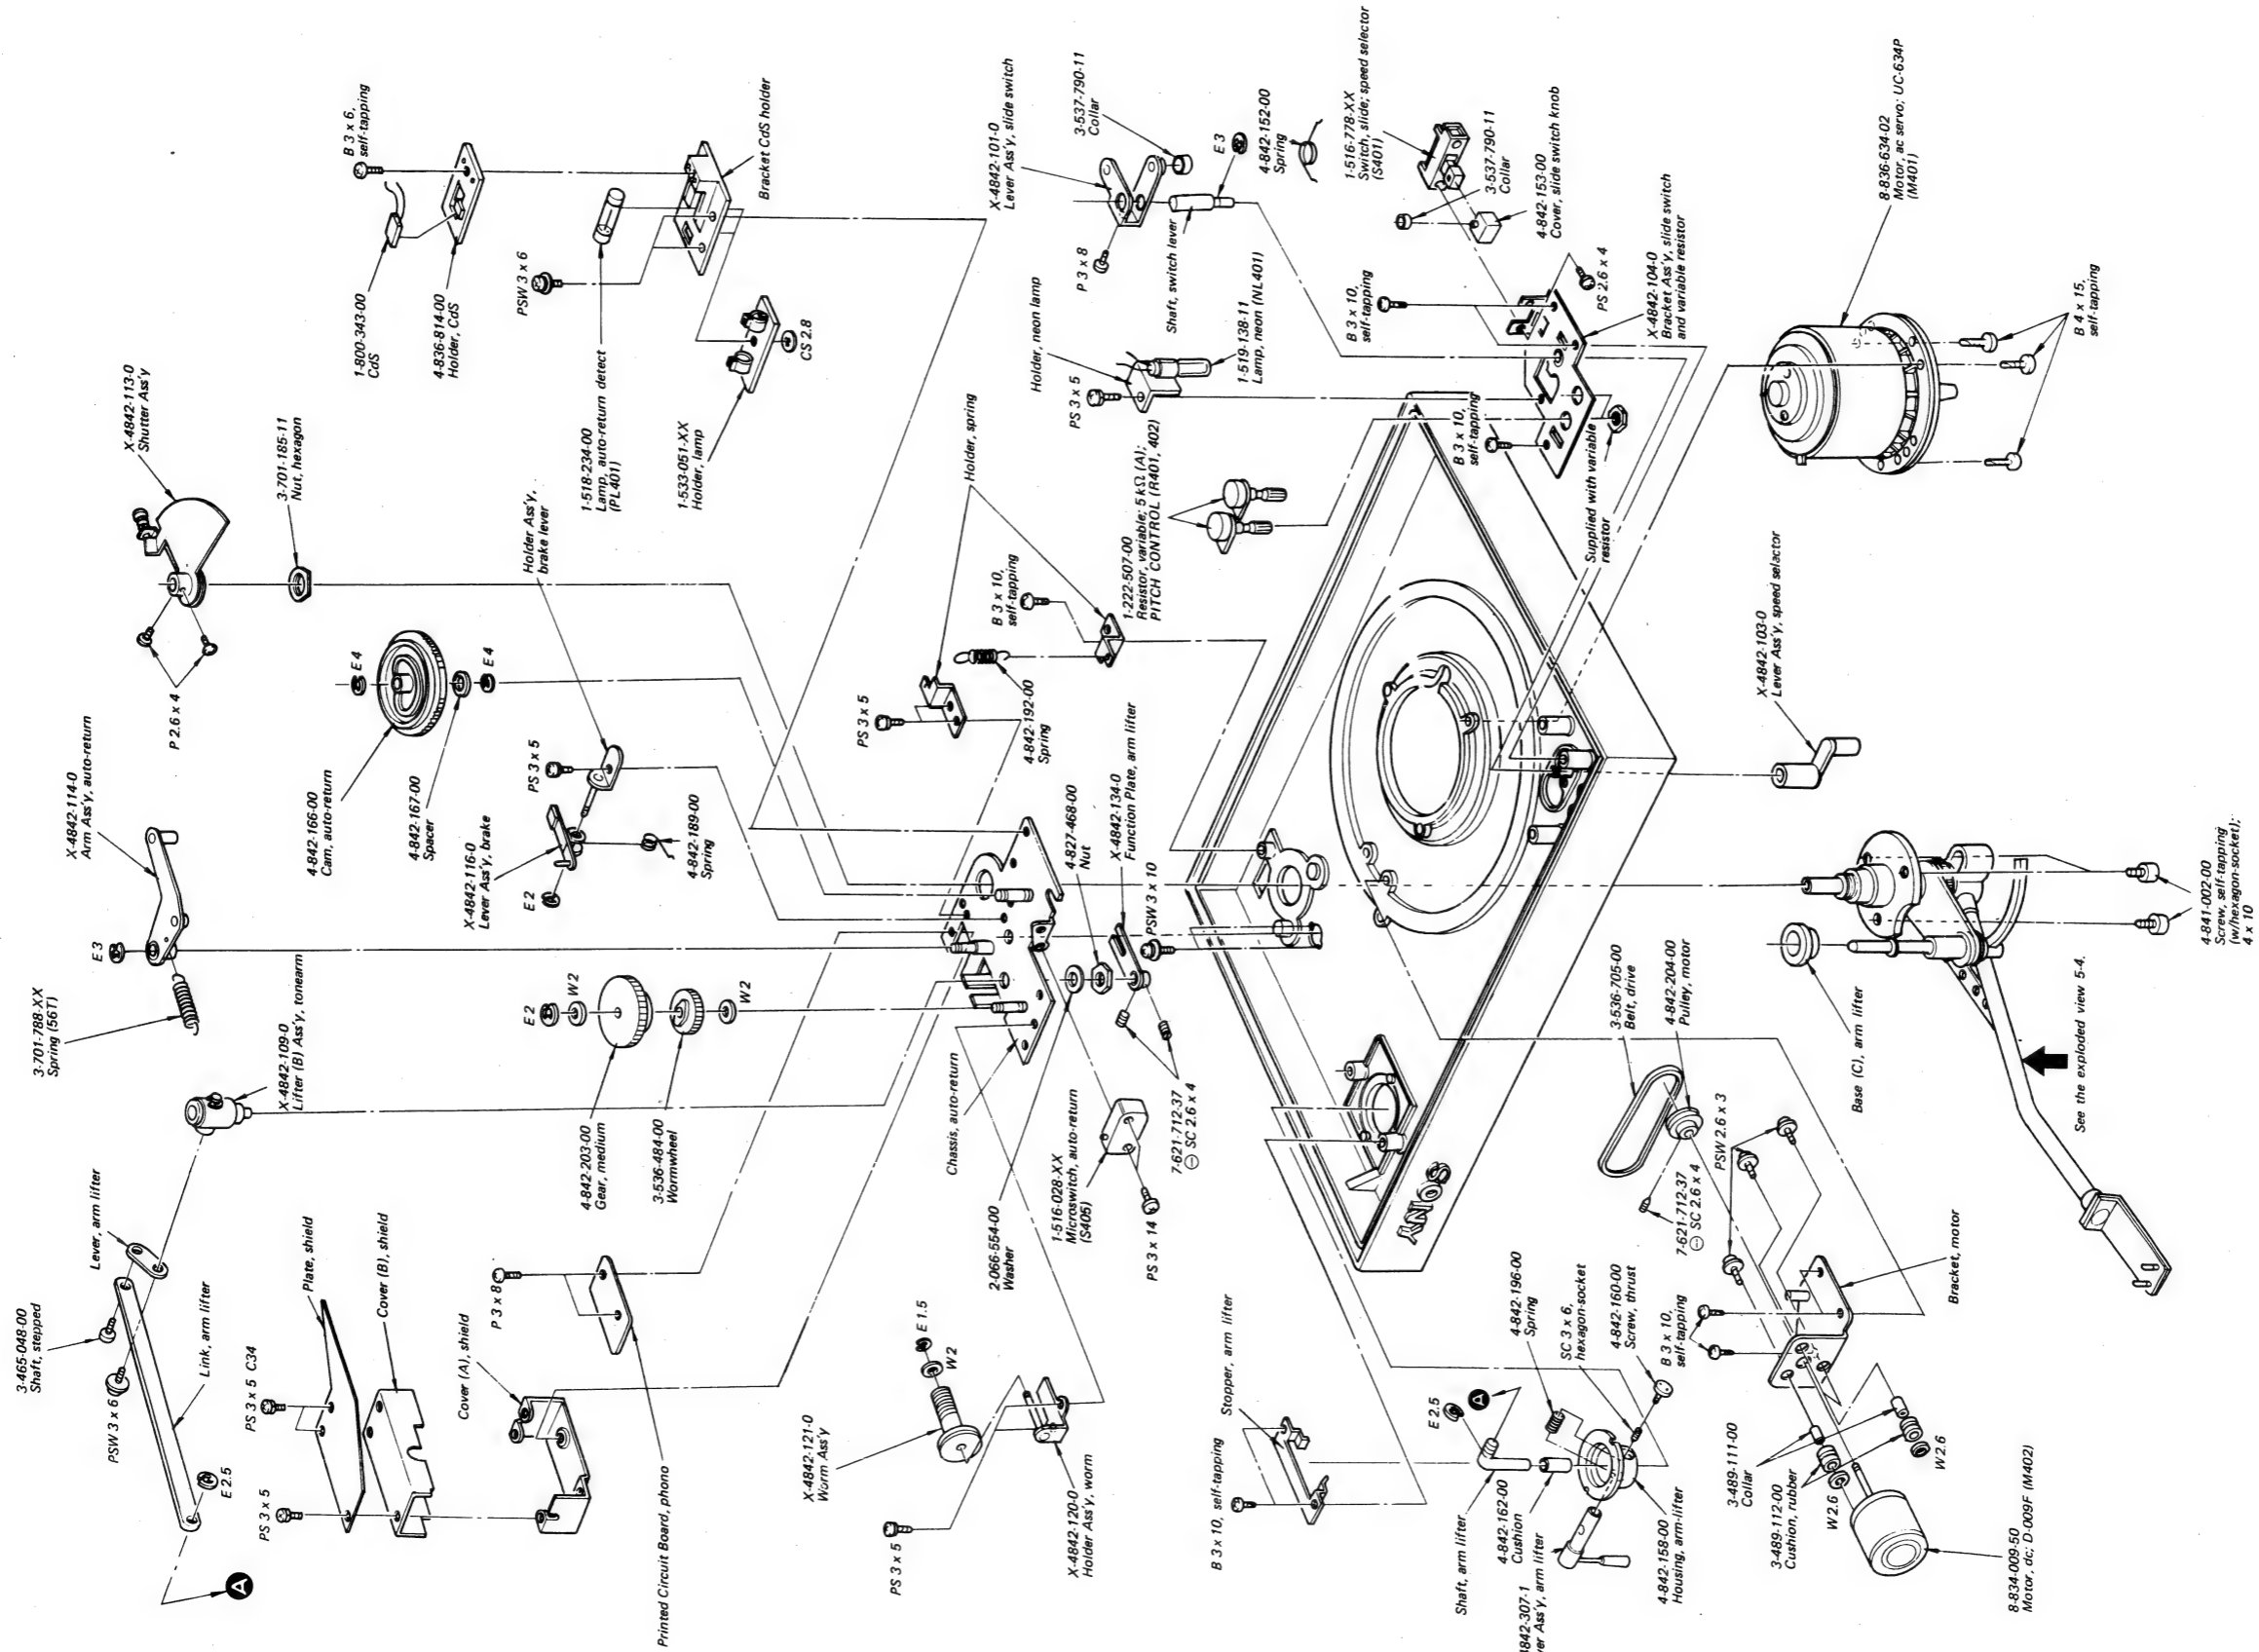

**Note:**


- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- (-) = slotted head
- (□□□) shows the number of coils in spring.

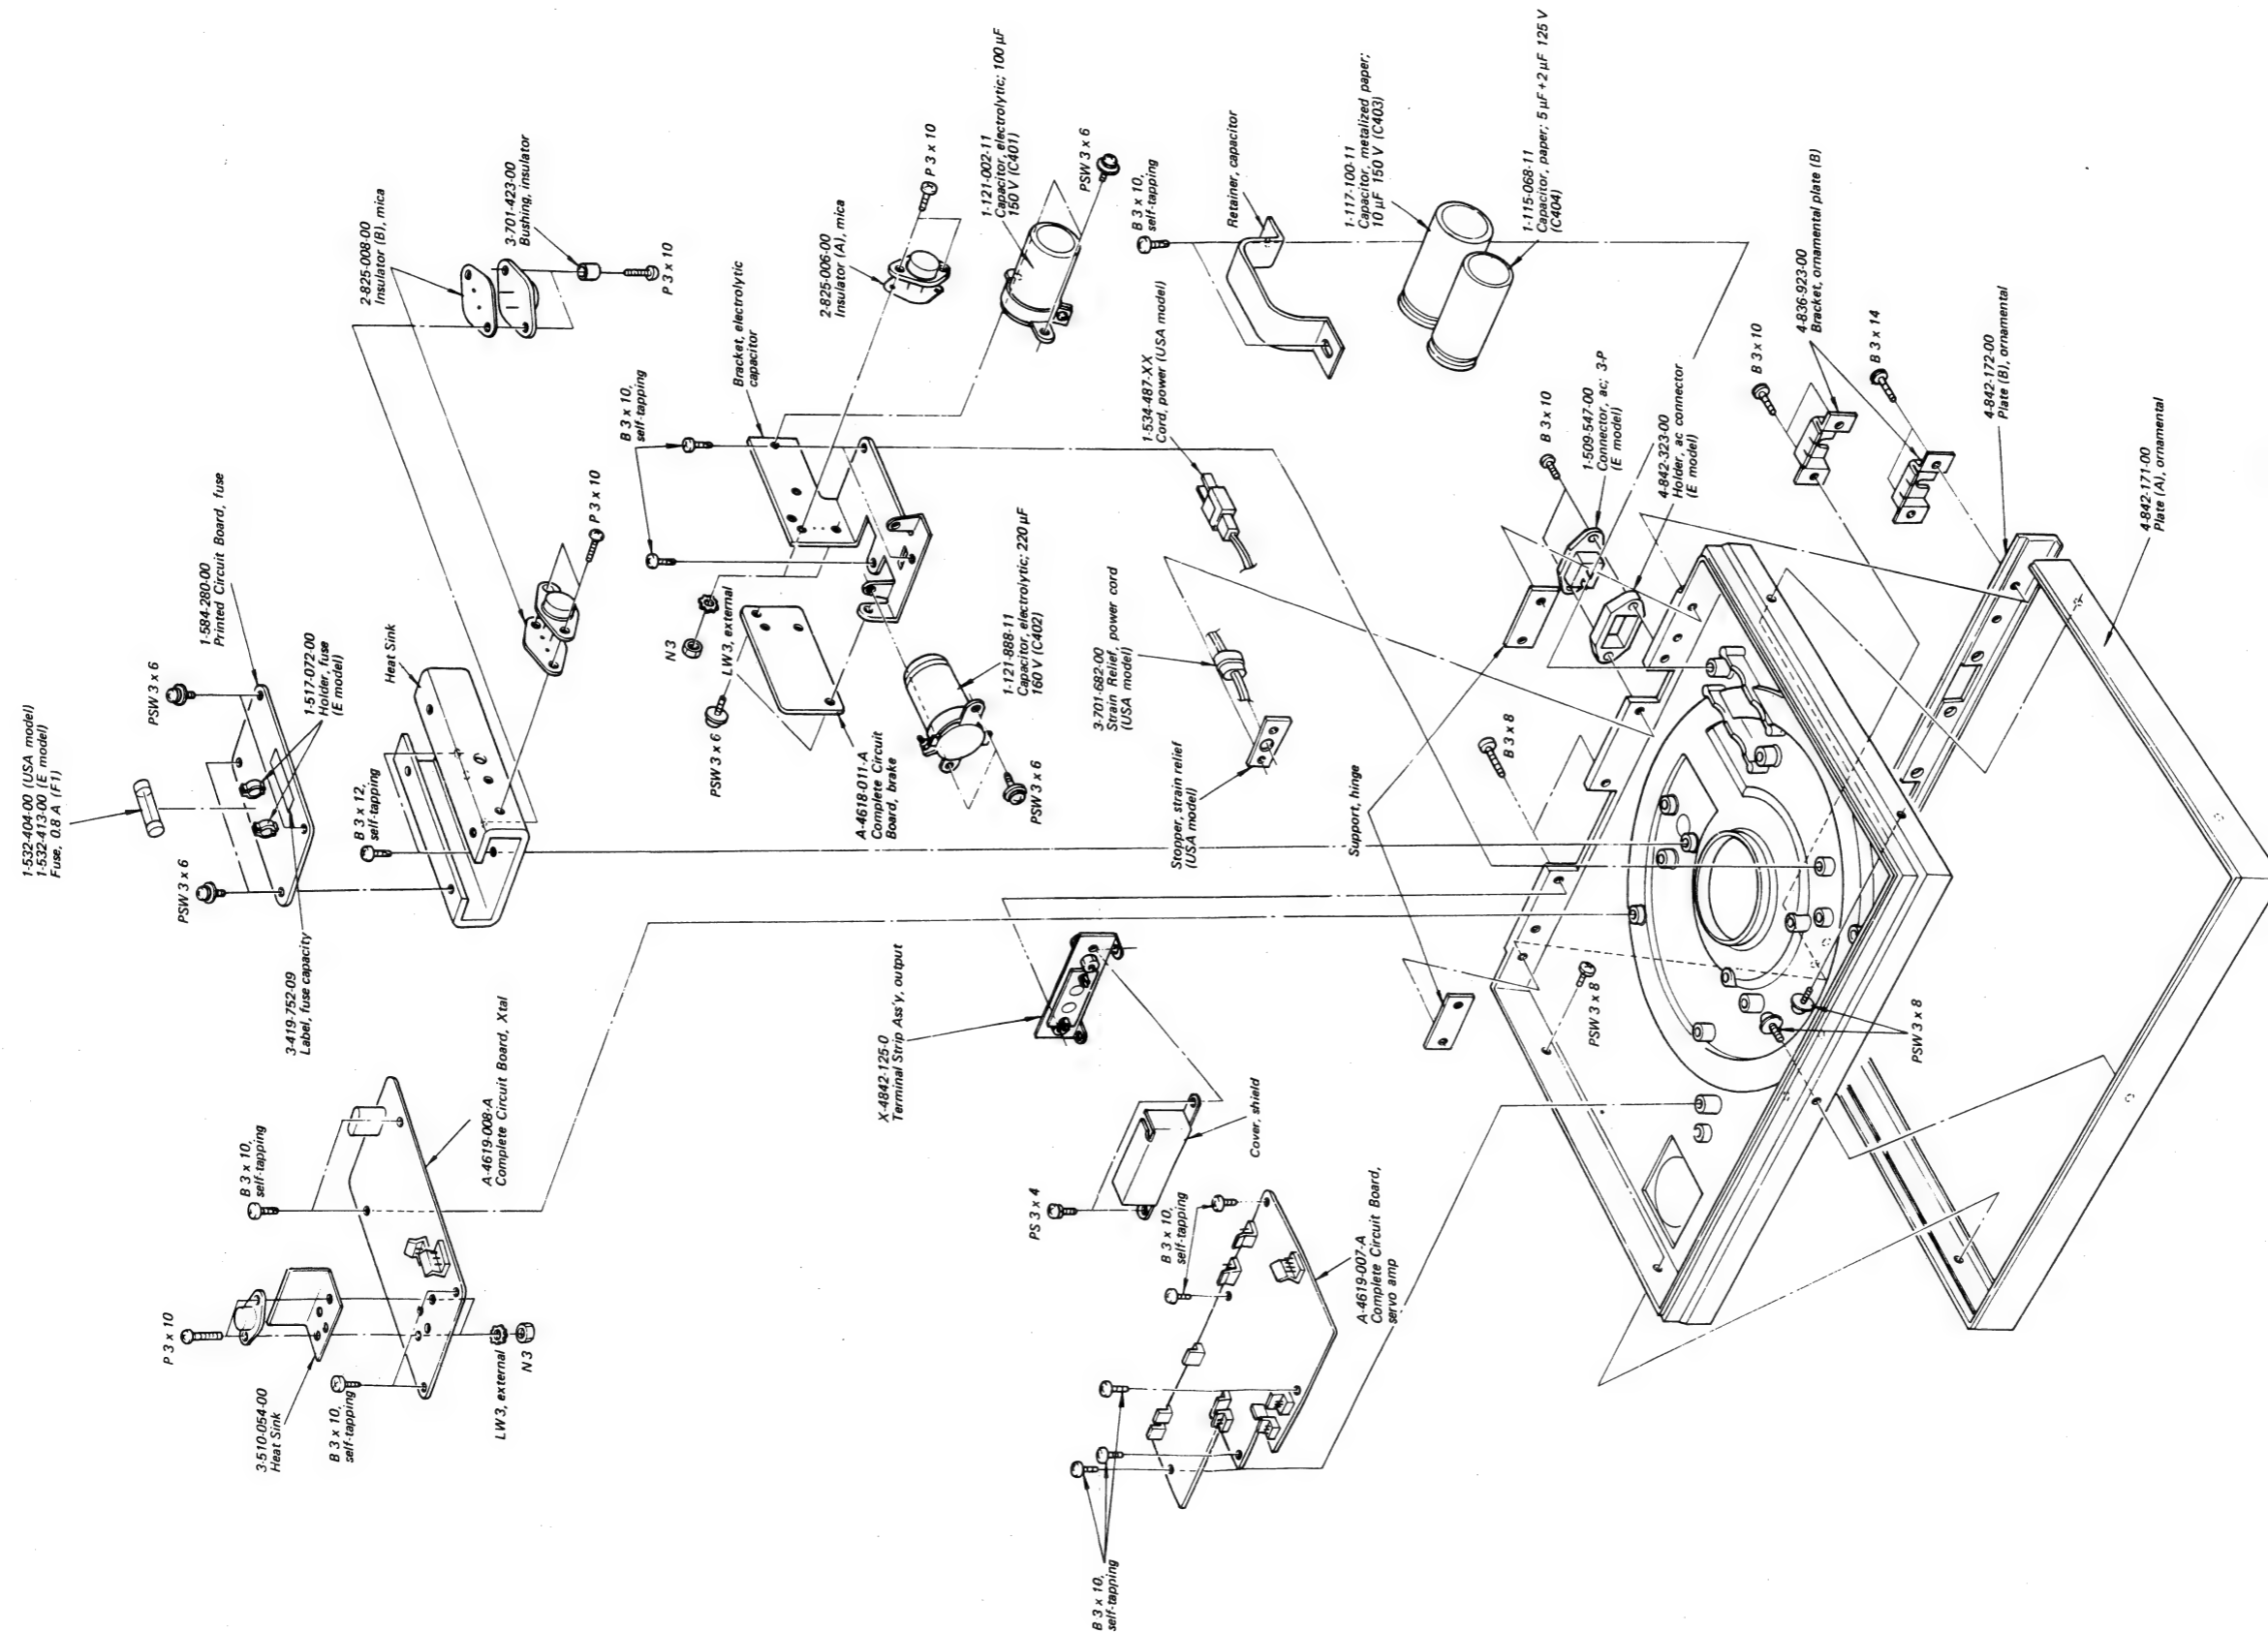

**Note:**

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- (–) = slotted head
- (□□T) shows the number of coils in spring.

5-4.

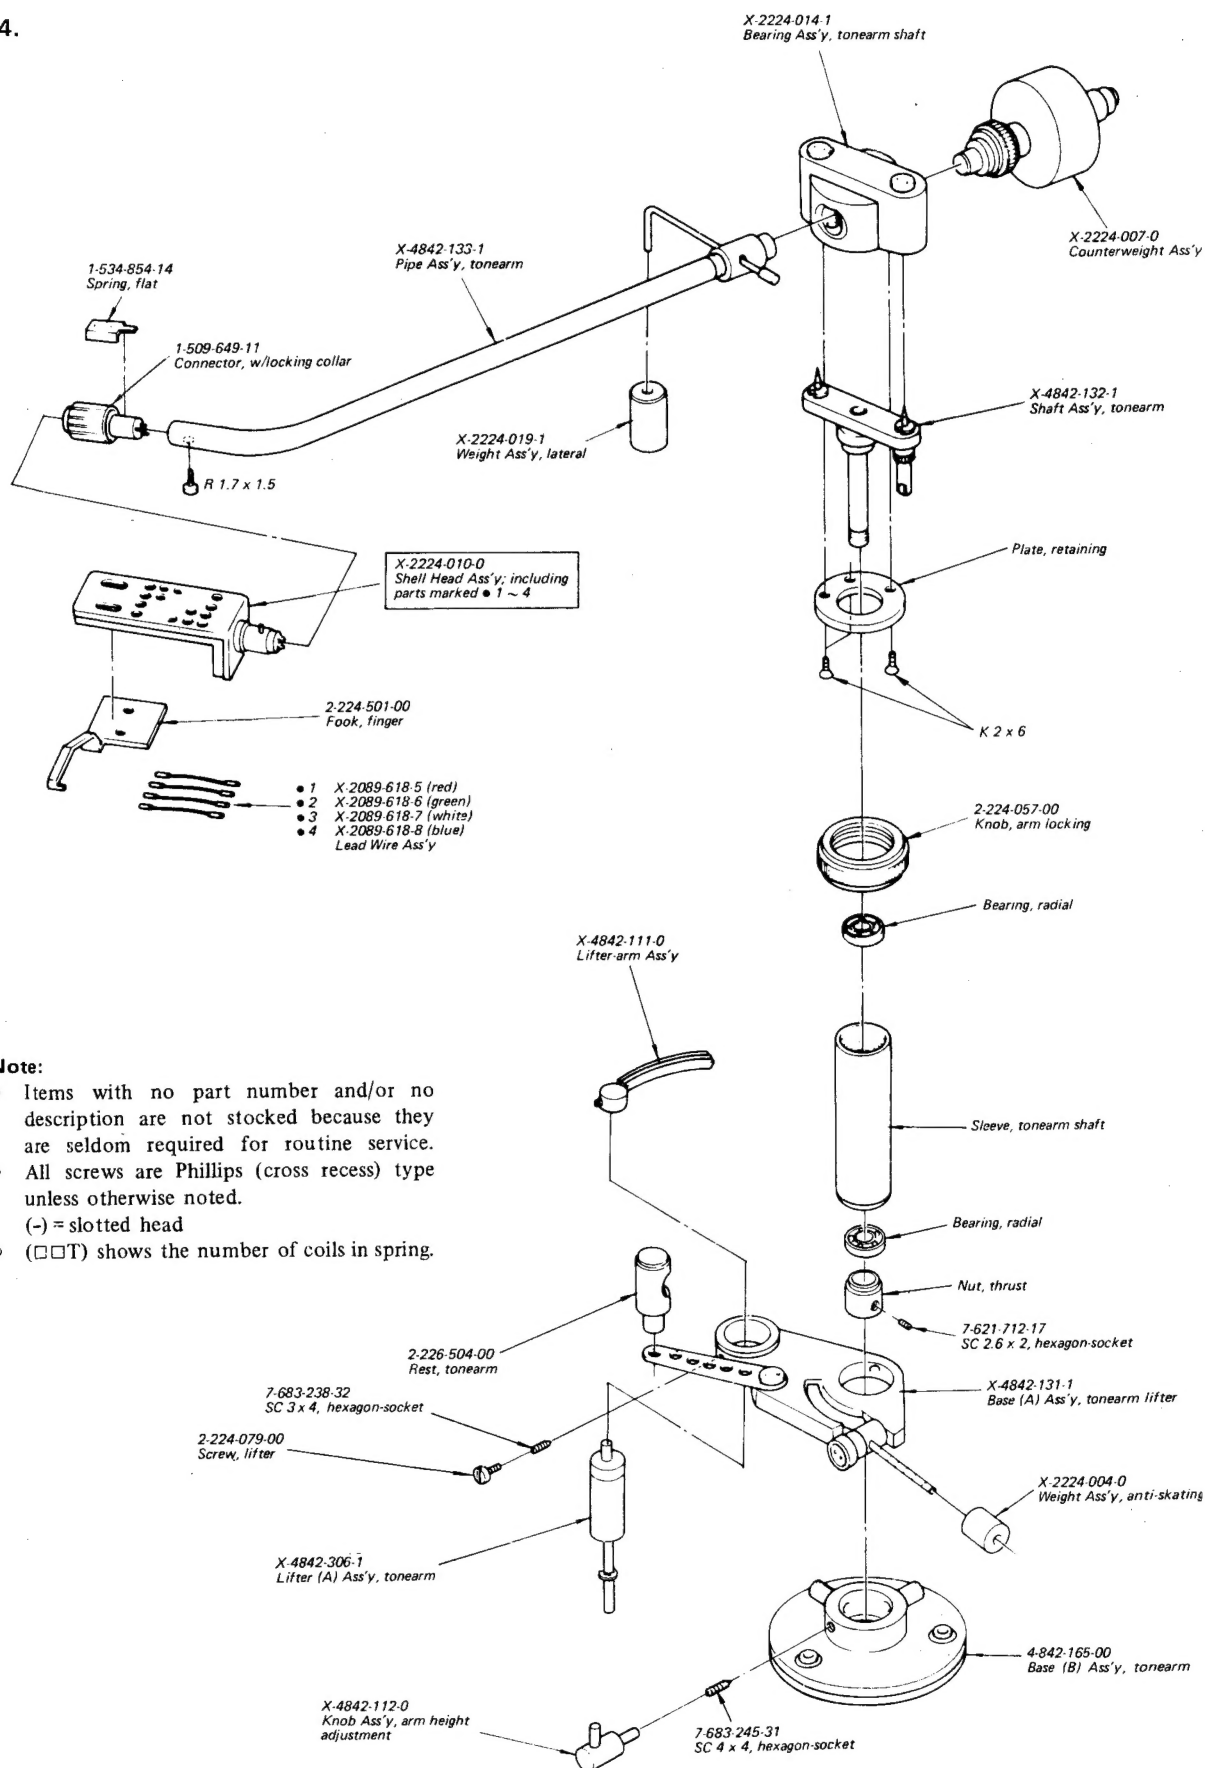

**Note:**

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- (-) = slotted head
- (□□T) shows the number of coils in spring.

## SECTION 6 ELECTRICAL PARTS LIST

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
<b>COMPLETE CIRCUIT BOARDS</b>			<b>Diodes</b>		
	A-4618-011-A	brake	D1,2		VD1220
	A-4619-007-A	servo amp	D3,4		MV5L
	A-4619-008-A	Xtal	D7~10		10E2
			D11~17		1S1555
			D18		EQA01-12S
<b>PRINTED CIRCUIT BOARDS</b>			D23,24		2S1555
	1-584-280-00	fuse	D25		1T40
<b>SEMICONDUCTORS</b>			D101~105		1S1555
<b>Transistors</b>			D106		10E2
Q1~4	2SC633A		D107		1S1555
Q5,6	2SA677		D108		10E2
Q7,8	2SC633A x 2		D201,202		10E2
	(replacement transistor for 2SC1963)		D203		10E4
Q9	2SA677		<b>CAPACITORS</b>		
Q10	2SC633A		All capacitors are in $\mu\text{F}$ and of electrolytic unless otherwise noted. ( $p = \mu\mu\text{F}$ ) 50 or less working volts are omitted except for electrolytic type.		
Q11	2SA677		C1	1-108-847-12	0.068 mylar
Q12~21	2SC633A		C2	1-121-726-11	0.47 50 V
Q22	2SC1474		C3	1-121-352-11	47 10 V
Q23~30	2SC633A		C5	1-121-392-11	3.3 25 V
Q31,32	2SC1760		C6,7	1-121-651-11	10 16 V
Q101~107	2SC633A		C8	1-102-836-11	470 p ceramic
Q108	2SC1760		C9	1-103-043-11	10000 p styrol
Q109	2SC633A		C10	1-108-837-12	0.01 mylar
Q110	2SC1127		C11	1-121-726-11	0.47 50 V
Q111	2SC926A		C14	1-131-237-11	1.5 25 V tantalum
Q112	2SC1431		C15	1-108-825-12	0.001 mylar
Q201	2SC926A		C16	1-108-846-12	0.056 mylar
Q202,203	2SA639S		C17	1-108-825-12	0.001 mylar
Q204	2SC867		C18	1-108-847-12	0.068 mylar
Q401	2SD69		C19	1-121-391-11	1 50 V
<b>ICs</b>			C20,21	1-108-844-12	0.039 mylar
IC101	MSM5576		C22~24	1-121-391-11	1 50 V
IC102~106	M53200P		C25,26	1-121-352-11	47 10 V
IC107	M53210P		C27	1-121-419-11	220 6.3 V
IC108	M53220P				

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	
C28	1-121-404-11	33	25 V
C29	1-121-392-11	3.3	25 V
C30~33	1-121-726-11	1	50 V
C34	1-121-245-11	1000	16 V
C35	1-121-410-11	470	25 V
C36	1-121-245-11	330	25 V
C38	1-108-825-12	0.001	mylar
C101	1-108-833-12	0.01	mylar
C102~107	1-102-967-11	22 p	ceramic
C108,109	1-102-491-11	51 p	ceramic
C110,111	1-101-919-11	0.0022	ceramic
C112	1-131-195-11	33	10 V tantalum
C113	1-108-833-12	0.01	mylar
C114~123	1-102-967-11	22 p	ceramic
C124	1-108-833-12	0.01	mylar
C125	1-101-001-11	0.001	ceramic
C126	1-108-816-12	0.1	mylar
C127	1-108-833-12	0.01	mylar
C128	1-131-195-11	33	10 V tantalum
C129,130	1-102-967-11	22 p	ceramic
C131	1-121-414-11	100	10 V
C132	1-123-008-11	10	350 V
C201	1-129-720-11	0.033	400 V plastic
C401	1-121-002-11	100	150 V
C402	1-121-888-11	220	160 V
C403	1-117-100-11	10	150 V metalized paper
C404	1-115-068-11	5 + 2	125 V paper
C405	1-108-747-22	0.1	300 V mylar (E model)
	1-108-747-11	0.1	120 V mylar (USA model)

## RESISTORS

All resistors are in ohms. Regular-type ¼ W carbon and composition resistors are omitted. Check schematic diagram for resistance values. k = 1000

R13,15	1-224-255-XX	100 k	adjustable
R14	1-213-200-11	270 k	¼ W metal-oxide
R16	1-213-201-11	390 k	¼ W metal-oxide
R21	1-213-199-11	10 k	metal-oxide
R24,25	1-213-198-11	6.8 k	metal-oxide

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	
R42	1-212-366-11	3.3	1 W carbon
R70	1-222-701-00	470	adjustable
R72	1-213-129-11	68	1 W metal-oxide
R77	1-222-994-00	220 k	adjustable
R90	1-222-805-00	10 k	adjustable
R93	1-206-122-11	420	2 W metal-oxide
R96	1-206-481-11	56	2 W metal-oxide
R136	1-206-672-11	2.2 k	2 W metal-oxide
R209	1-217-300-11	15	5 W wirewound
R210	1-217-304-11	33	5 W wirewound
R401,402	1-222-507-00	5 k (A), variable;	PITCH CONTROL

## SWITCHES

S401,402	1-516-778-XX	Slide, speed selector, XTAL LOCK
S403,404		START/STOP, REJECT (included in contact)
S405	1-516-028-XX	Micro, auto-return
S406	1-516-655-31	Rocker, frequency selector (E model)
S407	1-514-864-XX	Micro, POWER (USA model)
	1-516-889-00	Micro, POWER (E model)

## MISCELLANEOUS

CP401	1-101-534-00	Encapsulated Component
F1	1-532-404-00	Fuse, 0.8 A (USA model)
	1-532-413-00	Fuse, 0.8 A (E model)
H401	1-543-066-00	Head, speed detecting
M401	8-836-634-02	Motor, ac servo; UC-634P
M402	8-834-009-50	Motor, dc; D-009F
NL401	1-519-138-11	Lamp, neon
PL401	1-518-234-00	Lamp, auto-return detect
T401	1-442-557-00	Transformer, power (E model)
	1-442-582-00	Transformer, power (USA model)
L401	1-421-302-22	Coil, line filter
	1-509-547-00	Connector, ac; 3-p (E model)
	1-509-649-11	Connector, w/locking collar
	1-517-072-00	Holder, fuse (E model)
	1-526-520-21	Voltage Selector (E model)
	1-527-903-00	Crystal
	1-533-051-XX	Holder, lamp
	1-534-487-XX	Cord, power (USA model)
	1-534-854-14	Spring, flat
	1-800-343-00	Cds

**ACCESSORIES**

<u>Part No.</u>	<u>Description</u>
X-2224-011-0	Screw Ass'y, cartridge
1-534-551-XX	Cord, power (E model)
1-551-085-11	Cord, phono
2-089-697-00	Screwdriver
2-224-086-00	Sub-weight
3-780-752-11	Manual, instruction (E model)
3-780-752-21	Manual, instruction (USA model)
3-793-395-13	Gauge, overhang adjustment
4-808-461-00	Adaptor, 45 rpm